

AM3440-A-CHPAa

AM3440-A-CHPAa

Features

System Capacity

- Full frontal access (ETSI) Shelf, with 4 x mini slots and 12 x single slots for TDM N x 64K plug-in modules
- DACS (Digital Access Cross-Connect System) with full non-blocking nx64K (2048 x 2048 DS0) cross-connect support Dual controller, dual power with load sharing
- Up to 8 x GE SFP on AM3440-CCPB-8GEHSWa controller module, up to 16 x GE SFP with dual controllers
- Slot 1 and Slot 2 support TDM N x 64K plug-in modules and 8GEAa* high speed tributary module

Management

- Console, Telnet, Web GUI (optional) and Inband management support SNMP v.1 and v.3
- Compatible to a SNMP based GUI network management system and supported by Loop iNET and Loop iNMS
- Supports RADIUS authentication

MPLS-TP

- MPLS Transport Profile per RFC-5921
- Any Ethernet port can be configured as NNI (MPLS port) or UNI (Ethernet service port)
- Static MPLS LSP label provisioning via NMS
- Pseudo Wire (PW) to support
 - Ethernet Pseudo Wire (VPWS, VPLS, H-VPLS)
- MPLS-TP OAM
 - Section/LSP/PW TP-OAM using BFD (Per IEEE 8113.2)
- MPLS-TP QoS
 - 64K Granularity Rate Limit Per Flow

- Ingress/Egress TC/EXP Class Mapping
- TC/EXP Priority-based Queuing (8 Queues)
- Tunnel Traffic Engineering CIR/PIR and CBS/PBS Policing/Shaping
- PW Traffic Engineering CIR/PIR and CBS/PBS Policing/Shaping
- WRED (Weighted Random Early Detection)
- Strictly Priority / WRR

Carrier Ethernet (CE)

- L2 Switching/Bridging
- RSTP/MSTP (IEEE 802.1w/1s)
- VLAN 1Q 802.1q/ Q in Q 802.1ad
- VLAN Operation: Stack/Switch/Strip
- Link Aggregation (802.3ad): Static/LACP

Ethernet Services

- E-Line, E-LAN, E-Tree services as defined by MEF 9 and 14 and using VPWS/VPLS
- Native Ethernet packets supported
- Encapsulation: PW/LSP (MPLS-TP), VLAN tagging (1Q), VLAN double tagging (Q-in-Q)

L3 Routing*

- Static Route
- RIPv1 and RIPv2
- OSPFv2 and OSPFv3

VPLS

- VPLS bridging
- H-VPLS bridging
- 32K MAC addresses
- 2K VPLS instances per device
- Split horizon to prevent forwarding loops

Network Protections

- MPLS-TP
 - MPLS LSP 1+1/1:1
 - Dual-homing PW Protection
 - LSP E2E protection switching within sub 50ms

*Future Option

- CE
 - ERPS Ring (G.8032) Protection
 - ELPS (G.8031) Linear Protection
- E1/T1/TDMoEA* 1+1 protection
- DS0 Level Nx64K circuit protection
- PDH ring protection, QE1/QT1, FOM, Mini QE1/QT1

PWE3 Services

- Ethernet over CE
 - Port-based and VLAN-based services
 - EPL, EVPL, EPLAN, EVPLAN, E-Tree services as defined by the MEF 9&14
 - Encapsulation: VLAN 802.1Q/802.1ad Q in Q
- Ethernet over MPLS
 - Port-based and VLAN-based services
 - VPWS, VPLS, H-VPLS services as defined by the MEF 9 and 14
 - Encapsulation: PW over MPLS-TP
- PDH over MPLS/CE/IP
 - Framed E1/T1: CESoPSN, and MEF8 for emulation of TDM circuits
 - Unframed E1/T1: SAToP PW
 - PDH Clock Recovery: ACR/System Clock per PW configurable

All the plug-in cards are hot-pluggable

Item	AM3440-A-CHPAa
Chassis	5U
# of Mini-slots	4
# of Single slots	12
Maximum E1/T1 Channels	64
Maximum GE Ports	32**
Pseudowire bundles	64
DS0 Cross-Connect Backplane Capacity	128Mbps
Packet Switching Capacity	33G**

Controller and Function

Controller Function	CCPB-8GEHSWa	CCPB-2GEa	CCPB-DCSa
DB9 console ^{Note}	√	√	√
Micro USB console	√	√	√

Note:

Both DB9 and micro USB console are available for AM3440-CCPB series controller, however only one of them will activate at a time.

* Future Option

** With Dual Controllers and two 8GEAa modules

Description

The Loop-AM3440-A product is Access DCS-MUX which supports multiplexing of various digital access interfaces into E1 or T1 lines for convenient transport and switching. The Loop-AM3440-A Access DCS-MUX provides access for a variety of TDM, packet, and voice interfaces detailed on the next page. These interfaces are compatible with other Loop products. The AM3440-A can act as a mini DACS: one or more of the WAN ports can be used as a Drop & Insert function with fractional E1/T1 lines, which can be muxed into a full E1/T1 line.

The AM3440 controller module provides full non-blocking Nx64K cross-connect matrix up to 2048 DS0. System redundancy is available in dual controller and power modules, making it an excellent fit for critical applications. With Loop-AM3440-CCPB-8GEHSWa controller module, it supports both MPLS-TP and Carrier Ethernet functions as Packet Transport Network. In addition to the native Ethernet transport, the AM3440 can be used as the gateway of PDH into the PSN network using circuit emulation technologies. The TDM encapsulation technologies supported are TDMoE, and TDMoIP. In parallel, the Circuit Emulation supported are CESoPSN (Nx64K) and SAToP (Unframed E1/T1).

While 1+1 link protection is available for E1, T1, and TDMoEA* modules, path protection for end-to-end Nx64K circuit protection is available for 3E1/T1.

The AM3440-A supports local control and diagnostics by using a VT-100 terminal connected to the console port. It supports Ethernet, Telnet, and SNMP, so that it can be controlled and diagnosed from remote ends. An in-band management channel with GUI is available as well.

Loop-AM3440-A has a number of plug-in slots in regular size and mini size. (Card size to slot compatibility is detailed on the next page.) Most of the plug-in cards have LED indications.

The AM3440-A consists of a rugged reinforced aluminum chassis, giving this equipment a durable structure and a long-lasting physical life.

Controller Variants

Controllers	AM3440-CCPB-DCSa	AM3440-CCPB-2GEa	AM3440-CCPB-8GEHSWa
Feature	Common controller module, support cross-connect function. One USB console port, one DB9 console port and one RJ45 SNMP port.	Packet controller module, support cross-connect function, 2 x Combo GbE (SFP/RJ45) interfaces for TDMoE uplink, one USB console port, one DB9 console port and one RJ45 SNMP port. <ul style="list-style-type: none"> ● Supports SAToP, CESoPSN, and MEF-8 ● Up to 64 Pseudowires ● Supports SyncE 	Packet controller module, support cross-connect function, 4 x GbE and 4 x FE/GbE SFP interface with built-in L2 switch, one USB console port, one DB9 console port and one RJ45 SNMP <ul style="list-style-type: none"> ● Supports SAToP, CESoPSN, and MEF-8 ● Up to 64 pseudowires. ● Supports SyncE
Switch	No	No	Yes
Ethernet Port	No	2	8
External Clock Input	2 from AM3440-CLKa or CLKb*	2 from AM3440-CLKa or CLKb*	2 from AM3440-CLKa or CLKb*
External Clock Output	1 from AM3440-CLKa or 2 from AM3440-CLKb*	1 from AM3440-CLKa or 2 from AM3440-CLKb*	1 from AM3440-CLKa or 2 from AM3440-CLKb*
Alarm Input	1 from AM3440-CLKa	1 from AM3440-CLKa	1 from AM3440-CLKa
Alarm Output	From AM3440-CLKa: 1 x Fuse Alarm 1 x System Alarm From AM3440-CLKb*: 1 x Fuse Alarm 3 x Performance Alarm (Critical/Major/Minor)	From AM3440-CLKa: 1 x Fuse Alarm 1 x System Alarm From AM3440-CLKb*: 1 x Fuse Alarm 3 x Performance Alarm (Critical/Major/Minor)	From AM3440-CLKa: 1 x Fuse Alarm 1 x System Alarm From AM3440-CLKb*: 1 x Fuse Alarm 3 x Performance Alarm (Critical/Major/Minor)

Loop-AM3440-A-CHPAa plug-in cards:

The mini-slot cards plug into the mini-slots of the AM3440-A-CHPAa. The single-slot cards plug into single slots.

Note: √ = Supported × = Not Supported * = Future Option (D) = Discontinued

Low-Speed Tributary Modules	Controller Plug-in cards	AM3440-CCPB-DCSa	AM3440-CCPB-2GEa	AM3440-CCPB-8GEHSWa
Single-Slot	Transportation			
	3-channel E1	√	√	√
	3-channel T1	√	√	√
	4-channel E1	√	√	√
	4-channel T1	√	√	√
	4-channel TDMoEA	√*	√*	√*
	1FOMA	√	√	√

	2-channel G.SHDSL (2 pairs) w/o line power	√	√	√
	4-channel G.SHDSL (1 pair) w/o line power	√	√	√
	Serial and Digital Access			
	6-channel UDTEA	√	√	√
	8-channel UDTEA	√	√	√
	6-channel RS232 with V.110 encoding	√	√	√
	8-channel RS232 with X.50 subrate	√	√	√
	8-channel Subrate Data Unit (8SRU)	√*	√*	√*
	6-channel G.703 Co-Directional (6CDA)	√*	√*	√*
	8-channel OCU-DP	√	√	√
	Voice and Analog Access			
	8-channel 2W/4W E&M (8EMA)	√	√	√
	12-channel FXS (12FXSA)	√	√	√
	12-channel FXO (12FXOA)	√	√	√
	12-channel Magneto (12MAGA)	√	√	√
	Data Processing			
	8-channel Dry Contact I/O Type (D)	√	√	√
	8-channel Dry Contact I/O Type B	√	√	√
	8-channel Dry Contact I/O Type C	√	√	√
	8-channel Data Bridge	√	√	√
	Packet Access			
	8-LAN-port/ 64-WAN-port Router-B	√	√	√
	Teleprotection Access			
	4-channel low speed optical (C37.94)	√	√	√
	4-channel low speed optical (SFP port)	√	√	√
Mini-Slot	Transportation			
	1-channel E1 (Single E1 interface) with 75ohm	√	√	√
	1-channel E1 (Single E1 interface) with 120ohm	√	√	√
	1-channel T1 (Single T1 interface)	√	√	√
	Mini Quad E1 (Four E1 interfaces) with	√	√	√

	75ohm			
	Mini Quad E1 (Four E1 interfaces) with 120ohm	√	√	√
	Mini Quad T1 (Four T1 interfaces)	√	√	√
	Fiber Optical Interface	√	√	√
Serial and Digital Access				
	1-channel X.21	√	√	√
	1-channel V.35	√	√	√
	1-channel RS232	√	√	√
	3-channel RS232	√	√	√
	1-channel OCU-DP	√	√	√
	1-channel G.703 Co-Directional	√	√	√
Voice and Analog Access				
	Quad E&M (QEMA)	√	√	√
	QFXSA (Four FXS voice interface)	√	√	√
	QFXO (Four FXO voice interface)(D)	√	√	√
	QFXOA (Four FXO voice interfaces)	√	√	√
	QMAGA (Four magneto voice interfaces)	√*	√*	√*
Data Processing				
	Echo Canceller card	√	√	√
	Analog Bridge card	√	√	√
	2-LAN port/64 WAN port Router-A	√	√	√
Teleprotection Access				
	LS Optical M1C37 Card	√	√	√
Clock and Alarm Module				
	CLKa card	√	√	√
	CLKb card*	√*	√*	√*
	CLKc card*	√*	√*	√*

High -Speed Tributary Modules	Controller	AM3440-CCPB- DCSa	AM3440-CCPB- 2GEa	AM3440-CCPB- 8GEHSWa
	Plug-in cards			
Single-Slot	Packet Access			
	8 GbE Interface card*	x	x	√*

Ordering Information

To specify options, choose from the list below:

Note: RoHS compliant units are identified by the letter **G** appearing at the end of ordering code.

Ordering Code	Description	Note
Main Unit		
Loop-AM3440-A-CHPAa- G	5U height rack chassis for AM3440-A without CPU, power and plug-in cards	<ul style="list-style-type: none"> 19"/23" ear mount included. Works with AM3440-CCPB-8GEHSWa, AM3440-CCPB-2GEa and AM3440-CCPB-DCSa controllers.
CPU Module		
Loop-AM3440-CCPB- OPT-mgmt-G	Controller module supporting cross-connect function. One USB console port, one DB9 console port and one RJ45 SNMP port on board.	<ul style="list-style-type: none"> Works with Loop-AM3440-A-CHPAa-G, Loop-AM3440-C-CHPCa-G and Loop-AM3440-D-CHPDa-G. For mgmt option, please refer to the following table for detailed information. For Clock IN/OUT and Alarm IN/OUT, please purchase one Loop-AM3440-CLKa or CLKb* module. Order two for redundancy.

*Future Option

■ Where **OPT** is used to select the controller modules. **MUST** select one from the below list.

8GEHSWa	Packet controller module, support cross-connect function, 4 x GbE SFP and 4 x FE/GbE SFP interfaces with built-in L2 switch and one RJ45 SNMP. <ul style="list-style-type: none"> Supports MPLS-TP and CE functions Supports SAToP, CESoPSN, and MEF-8 formats for TDMoE uplink, up to 64 pseudowires. Supports SyncE 	<ul style="list-style-type: none"> Work with AM3440-A-CHPAa chassis. Be sure to use with 48Vdc power supply If the operating temperature is higher than 50°C, a fan module is essential. Please purchase an additional Loop-AM3440-FAN-G in this case.
2GEa	Packet controller module, support cross-connect function, 2 x Combo GbE (SFP/RJ45) interfaces for TDMoE uplink, one DB9 console port, one Micro USB console port and one RJ45 SNMP port. <ul style="list-style-type: none"> Supports SAToP, CESoPSN, and MEF-8 Up to 64 Pseudowires Supports SyncE 	<ul style="list-style-type: none"> Work with AM3440-A-CHPAa, AM3440-C-CHPCa and AM3440-D-CHPDa chassis.
DCSa	Common controller module, support cross-connect function, one DB9 console port, one Micro USB console port and one RJ45 SNMP port.	<ul style="list-style-type: none"> Work with AM3440-A-CHPAa, AM3440-C-CHPCa and AM3440-D-CHPDa chassis.

■ Where **WEB** is used to identify if the controller is featured with web GUI configuration.

The plug-in modules can be configured on the web GUI includes:

Controller Card/Interface	AM3440-CCPB-DCSa	AM3440-CCPB-2GEa	AM3440-CCPB-8GEHSWa
Mini Plug-in Module			
M4E1	√	√	√
CLKa	√	√	√
ABRA	√	√	√
3RS232a	√	√	√
ECA	√	√	√
Single Slot Plug-in Module			
12FXOA	√	√	√
12FXSA	√	√	√

4E1	√	√	√
6RS232	√	√	√
8EMA	√	√	√
12Magnet	√	√	√
8UDTEA	√	√	√

■ Where **mgmt** is used to select the following functions. Please replace **mgmt** with your selection, or leave it blank for nothing.

mgmt=	Description	Note
LCT	Loop-AM3440-LCT activation license	Used with Loop-LCT Graphical Configuration Software for TDM application.
web	Web GUI configuration activation license	Used with Loop-AM3440-CCPB-8GEHSWa, Loop-AM3440-CCPB-2GEa and Loop-AM3440-CCPB-DCSa controllers.
[blank]	No configuration tool for management	If the above configuration tool is required in the future, it can be activated by an activation license.

Feature Activation License

Loop-AM3440-ERINGLIC	Feature Activation License for AM3440 CPU card to support framed E1 PDH-Ring function	Used with 4E1, M4E75, M4E120 and FOM
Loop-AM3440-TRINGLIC	Feature Activation License for AM3440 CPU card to support framed T1 PDH-Ring function	Used with 4T1
Loop-AM3440-LCTLIC	Feature Activation License for AM3440 CPU card to support LCT Graphical Configuration Software for TDM application	Used with Loop-LCT Software
Loop-AM3440-WEBLIC	Feature Activation License for AM3440 CPU card to support Web GUI Configuration function	Used with Loop-AM3440-CCPB-8GEHSWa, Loop-AM3440-CCPB-2GEa and Loop-AM3440-CCPB-DCSa controllers.

Mini Plug-in Module (Select 1 to 4 cards from list below)

Ordering Code	Description	Note
Transportation		
Loop-AM3440-E75- G	1-channel of E1 plug-in card w/ 75 ohm	
Loop-AM3440-E120- G	1-channel of E1 plug-in card w/ 120 ohm	
Loop-AM3440-T1- G	1-channel T1 plug-in card	
Loop-AM3440-M4T1- G	Mini Quad T1 plug-in card	Includes a three meter conversion cable (Loop-ACC-CAB-DB25M-300-4RJ48M- G).
Loop-AM3440-M4E75- G	Mini Quad E1 plug-in card with 75 ohm	Includes a three meter conversion cable (Loop-ACC-CAB-DB25M-300-8BNCF or Loop-ACC-CAB-DB25M-300-8BNCF). Please specify the required cable, otherwise the Loop-ACC-CAB-DB25M-300-8BNCF cable will be shipped.
Loop-AM3440-M4E120- G	Mini Quad E1 plug-in card with 120 ohm	Includes a three meter conversion cable (Loop-ACC-CAB-DB25M-300-4RJ48M)
Loop-AM3440-FOM- opt-G	Fiber Optical plug-in card	For opt option, please refer to the table below for detail information
Serial and Digital Access		
Loop-AM3440-1X21- G	1-channel X.21 plug-in card	
Loop-AM3440-1RS232- G	1-channel RS232 plug-in card	
Loop-AM3440-1V35- G	1-channel V.35 plug-in card	
Loop-AM3440-3RS232a- G	3-channel RS232 async/Sync, DCE/DTE plug-in card	To use with 3RS232a interface card, it is recommended to purchase a conversion cable (Loop-ACC-CAB-DB44M-150-2DB25F-DB9 F-DCE- G , or Loop-ACC-CAB-DB44M-150-2DB25F-DB9F)

Ordering Code	Description	Note
		-DTE- G)
Loop-AM3440-1CD- G	1-channel G.703 Co-Directional Interface at 64 Kbps data rate	
Loop-AM3440-1ODP	1 port OCU-DP Interface card	Only non-RoHS compliant model available Limited Quantity
Voice and Analog Access		
Loop-AM3440-QEMA- wr-m-Tn-x-G	Jumper selectable: 2/4 WIRE; A/B side Quad E&M voice card, complied with IEEE1613 standard.	Not applicable to ± 24 Vdc powered main units. For wr, m, n, x option, please refer to the table below for detail information Includes a 0.6 meter conversion cable (Loop-ACC-CAB-DB44M-60-4RJ45M- G)
Loop-AM3440-QFXOA- G	Quad FXO voice plug-in card used with 4 RJ11	Not applicable to ± 24 Vdc powered main units.
Loop-AM3440-QFXOA-GS- G	Quad FXO with GS plug-in card used with 4 RJ11	GS = Ground Start
Loop-AM3440-QFXSA- x-pt-G	Quad FXSA voice card	Jumper setting options: Loop Start, Ground Start (GS), Metering Pulse Transmit 12/16 KHz (MP)
Loop-AM3440-QFXSA-M- x-pt-G	Quad FXSA with MP 16KHz voice card	For x and pt options, please refer to the table below for detail information
Loop-AM3440-QFXSA-M12- x-pt-G	Quad FXSA with MP 12KHz voice card	
Loop-AM3440-QFXSA-GS- x-pt-G	Quad FXSA with GS	
Loop-AM3440-QFXSA-GM- x-pt-G	Quad FXSA with GS and MP 16KHz voice card	
Loop-AM3440-QMAGA- G*	Quad channel magneto plug-in module with ring across L1&GND and L1&L2. Software programmable.	Not applicable to ± 24 Vdc powered main units.
Data Processing		
Loop-AM3440-ECA- G	Echo canceller plug-in card	
Loop-AM3440-ABRA- G	Analog voice bridging plug-in card	
Packet Access		
Loop-AM3440-RTA- G	2-LAN ports/64 WAN port router/bridge plug-in card	
Teleprotection Access		
Loop-AM3440-M1C37- LSFOM-G	1- channel C37.94 plug-in mini card	
Clock and Alarm		
Loop-AM3440-CLKa- G	CLKa Mini Slot plug-in card. - Clock in x2, clock out x1 - Alarm in x1, Alarm out x2	Work with AM3440-A-CHPAa and AM3440-C-CHPCa chassis.
Loop-AM3440-CLKb- G*	CLKb Mini Slot plug-in card. - Fuse ALM x1 - Critical ALM x1, MJR ALM x1, MIN ALM x1 - Clock in x2, clock out x2	Work with AM3440-A-CHPAa and AM3440-C-CHPCa chassis.
Loop-AM3440-CLKc- G*	CLKc Mini Slot plug-in card. - For 1588 CLK in/out (1 x TOD, 1PPS in/out, and 1 x BITS in/out)	Work with AM3440-CCPB-8GEHSWa controller in AM3440-A-CHPAa chassis.

*Future Option

Low-Speed Single Slot Plug-in Module

Ordering Code	Description	Note
Transportation		
Loop-AM3440-3E1- cc-G	3-channel E1 plug-in card with DS0 (64K bps) SNCP circuit level protection Note: DS0 SNCP circuit level protection only support E1 frame mode	For cc option, please refer to the table below for detail information
Loop-AM3440-3T1- G	3-channel T1 Interface	
Loop-AM3440-4E1- cc-G	4-channel E1 plug-in card	For cc option, please refer to the table below for detail information
Loop-AM3440-4T1- G	4-channel T1 plug-in card	
Loop-AM3440-TDMoEA-PPM- G*	TDMoEA card with 2 GbE combo interfaces and 2 Ethernet interfaces (10/100/1000BaseT) plug-in module Support G.823 Traffic SFP optical module is not included.	Please order separately for SFP optical modules from SFP optical brochure.
Loop-AM3440-2GH- G	2-channel G.SHDSL plug-in card (2 pair)	
Loop-AM3440-4GH- G	4-channel G.SHDSL plug-in card (1 pair)	
Loop-AM3440-1FOMA- opt-G	1FOMA Fiber Optical Interface with 1x9 optical port	For opt option, please refer to the table below for detail information.
Serial and Digital Access		
Loop-AM3440-6CDA- cdm-G*	6-channel G.703 Interface at 64 Kbps data rate. Per port configurable for Co-directional or Contra-directional interfaces.	For cdm option, please refer to the table below for detail information.

Loop-AM3440-6UDTEA-G	<p>6-port universal data interface card that supports three software configurable modes:</p> <p>Port 1 to 4: two DB44 connectors</p> <p>Port 5 to 6: two RJ48 connectors</p> <p>Mode 1:</p> <p>Port 1 to 4: RS232/RS422/X.21, Async/Sync 64kbps and subrate with V.110 encoding</p> <p>Port 5 to 6: RS232 for ASYNC only</p> <p>Mode 2:</p> <p>Port 1 to 4: X.21/RS422 SYNC N*64k (N=1~32)</p> <p>Port 5 to 6: Disabled</p> <p>Mode 3:</p> <p>Port 1 to 3: X.21/RS422 SYNC N*64k, (N=1~32).</p> <p>Port 4: X.21/RS422 SYNC, N*64k, (N=1~20).</p> <p>Port 5 to 6: RS232 N*64k (N=1~6) oversampling for ASYNC data.</p> <p>Mode 4:</p> <p>Port 1 to 4: RS232/RS422/X.21/V.35/V.36/EIA530 SYNC 38.4K and subrate</p> <p>Port 5 to 6: Disabled</p> <p>Mode 5:</p> <p>Port 1 to 4: X.21/RS449/RS422/RS232/V.35/V.36/EIA530 SYNC N*64k (N=1~32)</p> <p>Port 5 to 6: Disabled</p>	<p>No conversion cable is included. Please order conversion cable separately from below table.</p> <p>Six conversion cable types are available:</p> <ul style="list-style-type: none"> - Loop-ACC-CAB-DB44M-100-2DB25F-VB - Loop-ACC-CAB-DB44M-100-2DB15F-VB - Loop-ACC-CAB-DB44M-100-1DB15F-1DB25F-VB - Loop-ACC-CAB-DB44M-100-2M34F-VB - Loop-ACC-CAB-DB44M-100-2DB37F-VB - Loop-ACC-CAB-DB44M-100-1DB37F-1M34F-VB
Loop-AM3440-8UDTEA-opm-G	<p>8-port universal data interface card that supports RS232/RS422/RS485 full-duplex DCE interface which is software configurable</p> <p>Available option mode: Terminal Server, Omnibus, and Clock Pass Through</p>	For opm option, please refer to the table below for detail information.
Loop-AM3440-6RS232A-RJ-G	6-port RS232 card with V.110 encoding, with 6 RJ48 connectors for 6 RS232 Async ports	
Loop-AM3440-6RS232A-DB-G	6-port RS232 card with V.110 encoding, with 2 DB44 connectors for Async and Sync ports	<p>Two conversion cables are included, DB44 connector to two DB25 and one DB9 connectors.</p> <p>(Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-DB)</p>
Loop-AM3440-8RS232-RJ-G	8-port RS232 plug-in card with X.50 subrate multiplexing scheme and X.54 encoding, with 8 RJ48 connectors for 8 RS232 Async ports	
Loop-AM3440-8RS232-DB-G	8-port RS232 plug-in card with X.50 subrate multiplexing scheme and X.54 encoding, with 2 RJ48 connectors and 2 DB44 connectors for Async and Sync ports	Two conversion cables are included (DB44 connector to two DB25 and one DB9 connector; (Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-DB).

Loop-AM3440-8SRU-DB- G*	8-port SRU plug-in card with DS0B-5 subrate multiplexing scheme and DS0A encoding, with 2 RJ48 connectors and 2 DB44 connectors for Async and Sync ports	To use with this card (DB version), it is recommended to purchase two conversion cables (Loop-ACC-CAB-DB44M-100-2DB25F-1DB 09F-DB- G x 2)
Loop-AM3440-8SRU-RJ- G*	8-port SRU plug-in card with DS0B-5 subrate multiplexing scheme and DS0A encoding, with 8 RJ48 connectors for Async ports	
Loop-AM3440-ODP- typ	8-channel OCU-DP plug-in card. Used with 8 RJ48S connectors or 1 Telco 64 connector.	Only non-RoHS compliant model available Limited Quantity
Voice and Analog Access		
Loop-AM3440-8EMA- x-pt-typ-G	8-channel 2W/4W E&MA plug-in card. Used with 8 RJ45 connectors or 1 Telco 64 connector.	pt = power type For x , pt and typ options, please refer to the table below for detail information
Loop-AM3440-12FXSA-02- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and PLAR. Without Ground Start and Metering Pulse. Used with 12 RJ11 connectors or 1 Telco 64 connector.	12FXSA-GMP includes all FXS card functions pta = power type.
Loop-AM3440-12FXSA-02-P- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [PLAR bit programmable]. Without Ground Start and Metering Pulse. Used with 12 RJ11 connectors or 1 Telco 64 connector.	For sn , pt , and typ options, please refer to the table below for detail information. Please use with 100-240Vac or ± 48 Vdc powered main units.
Loop-AM3440-12FXSA-02-M- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [Metering Pulse]. Used with 12 RJ11 connectors or 1 Telco 64 connector.	
Loop-AM3440-12FXSA-02-MPP- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [PLAR bit programmable] and [Metering Pulse]. Used with 12 RJ11 connectors or 1 Telco 64 connector.	
Loop-AM3440-12FXSA-02-GS- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR and [Ground Start]. Used with 12 RJ11 connectors or 1 Telco 64 connector.	
Loop-AM3440-12FXSA-02-GM- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [Ground Start] and [Metering Pulse]. Used with 12 RJ11 connectors or 1 Telco 64 connector.	
Loop-AM3440-12FXSA-02-GMP- sn-pt a-typ-G	12-channel FXSA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start, PLAR, [PLAR bit programmable], [Ground Start] and [Metering Pulse]. Used with 12 RJ11 connectors or 1 Telco 64 connector.	
Loop-AM3440-12FXOA- typ-G	12-channel FXOA plug-in card with 600/900 Impedance, Battery Reverse and Loop Start. Without Ground Start and Metering Pulse. Used with 12 RJ11 connectors or 1 Telco 64 connector.	For typ option, please refer to the table below for detail information.

Loop-AM3440-12FXOA-GS- typ-G	12-channel FXOA plug-in card with 600/900 Impedance, Battery Reverse, Loop Start and [Ground Start]. Used with 12 RJ11 connectors or 1 Telco 64 connector.	
Loop-AM3440-12MAGA- typ-G	12-channel Magneto plug-in module with ring across L1&GND and L1&L2. Software programmable. Used with 12 RJ11 connectors or 1 Telco 64 connector.	Not applicable to ± 24 Vdc powered main units. For typ option, please refer to the table below for detail information
Data Processing		
Loop-AM3440-8DCB- G	8-channel dry contact type B plug-in card with maximum voltage 220 Vdc or 250 Vac	
Loop-AM3440-8DCC- G	8-channel dry contact type C plug-in card with maximum voltage 100 Vdc or 250 Vac	
Loop-AM3440-8DBRA-RJ- G	8-channel data bridge plug-in card, with 8 RJ48 connectors for 8 data bridge Async ports	
Loop-AM3440-8DBRA-DB- G	8-channel data bridge plug-in card, with 2 RJ48 connectors and 2DB44 connectors for 8 data bridge Async ports	Two conversion cables are included (DB44 connector to two DB25 and one DB9 connector; (Loop-ACC-CAB-DB44M-100-2DB25F-1DB09F-DB).
Packet Access		
Loop-AM3440-RTB- G	8-LAN ports/64 WAN ports router/bridge plug-in card	
Teleprotection Access		
Loop-AM3440-4C37- LSFOM-G	4-channel C37.94 plug-in card	
Loop-AM3440-4C37SFPA- G	4-channel C37.94 plug-in card (SFP port)	Without SFP, SFP must be ordered separately.

Low-Speed Dual Slot Plug-in Module



Ordering Code	Description	Note
Loop-AM3440-TTA- pwr-G*	Dual slot transfer trip plug-in module for AM3440-A/C. Four ports for DTT input and output.	For pwr option, please refer to the table below for detail information.

High-Speed Single Slot Plug-in Module

Ordering Code	Description	Note
Packet Access		
Loop-AM3440-8GEAa- typ-G*	High-Speed Plug-in Module 8 GbE interface plug-in module with 10/100/1000BaseT RJ45 or SFP housing.	Applicable to Slot 1~2 of AM3440-A-CHPAa chassis and works with AM3440-CCPB-8GEHSWa controller. SFP optical module is not included. Please order separately for SFP optical modules from SFP optical brochure.

*Future Option

Accessories

Ordering Code	Description	Note
Power Module		
Loop-AM3440-SDPA- G	Single -24Vdc/-48Vdc (-18 to -75 Vdc) power module	 Order 2 single DC for redundancy
Loop-AM3440-SDP125- G	Single -125 Vdc (-80 to -150 Vdc) Power Module	 Order 2 single DC for redundancy
Power Adaptor		
Loop-ACC-ACx-DC48-320- G	320 Watts, AC (88 ~ 264Vac or 124~370Vdc to dc (+48Vdc, 6.7A) adaptor Working temperature: -30 to 70°C	

■ Where x is used for selecting AC power plug type:

x =	Description	Note
A	adaptor power plug type for USA and Taiwan	
E	adaptor power plug type for Europe	
U	adaptor power plug type for UK	

Fan Tray

Loop-AM3440-FAN- G	Fan tray	Power supplied from rear of chassis.
---------------------------	----------	--------------------------------------

Air Flow Guide Rack & Cable Management

Loop-AM3440-CMA- G	Cable Management for AM3440, 1U (44mm) with 10cm ring	
---------------------------	---	--

FXO Box

Loop-AM3440-FXO BOX	Support FXO Interface Battery Feed	Non-RoHS compliant
---------------------	------------------------------------	--------------------

Conversion Cables

Loop-ACC-CAB-DB25M-100-8 BNCM- G	DB25/Male to eight BNC/Male cable; Length: 100 cm	Use with Loop-AM3440-M4E75- G plug-in card
Loop-ACC-CAB-DB25M-100-8 BNCF- G	DB25/Male to eight BNC/Female cable; Length: 100 cm	Use with Loop-AM3440-M4E75- G plug-in card
Loop-ACC-CAB-DB25M-300-8 BNCM- G	DB25/Male to eight BNC/Male cable; Length: 300 cm	Use with Loop-AM3440-M4E75- G plug-in card
Loop-ACC-CAB-DB25M-300-8 BNCF- G	DB25/Male to eight BNC/Female cable; Length: 300 cm	Use with Loop-AM3440-M4E75- G plug-in card
Loop-ACC-CAB-DB25M-100-4 RJ48M- G	DB25/Male to four RJ48C/Male cable; Length: 100 cm	Use with Loop-AM3440-M4E120- G plug-in card
Loop-ACC-CAB-DB25M-300-4 RJ48M- G	DB25/Male to four RJ48C/Male cable; Length: 300 cm	Use with Loop-AM3440-M4E120- G plug-in card and Loop-AM3440-M4T1- G plug-in card

Loop-ACC-CAB-DB44M-100-2 DB25F-1DB09F-DB- G	DSUB-44 pin/Male to two DSUB-25 pin/Female- one DSUB-9 pin/Female (8P8C) plug, Length:100cm	Use with Loop-AM3440-8RS232-DB- G , Loop-AM3440-8DBRA-DB- G , Loop-AM3440-6RS232A-DB- G and Loop-AM3440-8SRU-DB- G* plug-in card
Loop-ACC-CAB-DB25M-30-1M 34F- G	DSUB-25pin/Male to M34/Female V.35 Conversion cable Length: 30 cm	Use with Loop-AM3440-1V35- G plug-in card
Loop-ACC-CAB-DB44M-100-2 DB25F-VB- G	DSUB-44 pin/Male to two DSUB-25 pin/Female plug, Length:100cm	Use with V.35 and RS232 interfaces.
Loop-ACC-CAB-DB44M-100-2 DB15F-VB- G	DSUB-44 pin/Male to two DSUB-15 pin/Female plug, Length:100cm	Use with X.21 interface.
Loop-ACC-CAB-DB44M-100-1 DB15F-1DB25F-VB- G	DSUB-44 pin/Male to one DSUB-15 pin/Female plug + one DSUB-25 pin/Female plug, Length:100cm	Use with RS232, V.35 and X.21 interfaces.
Loop-ACC-CAB-DB44M-100-2 M34F-VB- G	DSUB-44 pin/Male to two M34 pin/Female plug, Length:100cm	Use with V.35 interface.
Loop-ACC-CAB-DB44M-100-2 DB37F-VB- G	DSUB-44 pin/Male to two DSUB-37 pin/Female plug, Length:100cm	Use with EIA530/RS449 and RS422 interfaces.
Loop-ACC-CAB-DB44M-100-1 DB37F-1M34F-VB- G	DSUB-44 pin/Male to one DSUB-37 pin/Female plug + one M34 pin/Female plug, Length:100cm	Use with V.35, EIA530/RS449 and RS422 interfaces.
Loop-ACC-CAB-DB44M-60-4R J45M- G	DSUB-44pin/Male to four RJ45 Male (8P8C) conversion cable. Length: 60 cm	Used with QEMA plug-in card.
Loop-ACC-CAB-1SCM-200-1L CF- G	One SC/Male to one LC/Female fiber optic adaptor cable. Length: 200 cm	Used with Loop-AM3440-4C37- T-G .
Loop-ACC-CAB-DB44M-150-2 DB25F-DB9F-DCE- G	DSUB-44 pin/Male to two DSUB-25 pin/Female and one DSUB-9 pin/Female (8P8C) plug. Length:150cm	Used with Loop-AM3440-3RS232a- G and Loop-AM3440-S3RS232a- G plug-in card for DCE mode
Loop-ACC-CAB-DB44M-150-2 DB25F-DB9F-DTE- G	DSUB-44 pin/Male to two DSUB-25 pin/Female and one DSUB-9 pin/Female (8P8C) plug. Length:150cm	Used with Loop-AM3440-3RS232a- G and Loop-AM3440-S3RS232a- G plug-in card for DTE mode
Mounting Ear		
19"/23" ear mounts	A pair of 19"/23" ear mounts is supplied as part of standard package.	For other sizes, please contact your nearest Loop sales representative.
User's Manual		
Loop-AM3440-CCPB-UMS	User's Manual (optional, paper copy). A CD version of the manual is already included as standard equipment.	For AM3440-CCPB-8GEHSWa controller
Loop-AM3440-CCPB-UMG	User's Manual (optional, paper copy). A CD version of the manual is already included as standard equipment.	For AM3440-CCPB-2GEa controller
Loop-AM3440-CCPB-UMD	User's Manual (optional, paper copy). A CD version of the manual is already included as standard equipment.	For AM3440-CCPB-DCSa controller
Y-Box		
Loop-VV-B- G	1 for 1 protection Y-Box with BNC connectors (For 4 E1 ports)	Used with 4E1/M4E1 (75ohm)
Loop-VV-R- G	1 for 1 protection Y-Box with RJ48C connectors (For 16 E1 ports)	Used with 4E1/M4E1 (120ohm)
Loop-VV-T- G	1 for 1 protection Y-Box with RJ48C connectors (For 16 T1 ports)	Used with 4T1/M4T1
Blank Panels		
30.002744.A00- G	Blank Panel for Power Supply Slot	Use in AM3440-A-CHPAa chassis
30.002743.A00- G	Blank Panel for Controller Slot	Use in AM3440-A-CHPAa chassis
30.001027.A00- G	Blank Panel for Slot 1-12	Use in AM3440-A-CHPAa chassis
30.001030.A00- G	Blank Panel for mini Slot A-D	Use in AM3440-A-CHPAa chassis
SFP Optical Modules		
Please place your order using the 5-digit alphanumeric codes listed in the separate SFP Optical Module Brochure.		

For 4E1 and 3E1 cards:

■ Where **cc** is used to select connector:

cc =	Description	Note
RJ	RJ48C connector	
BNC	BNC connector	

For TDMoEA card:

SFP Optical/Electrical Module Plug-in option, please go to SFP Optical Module Brochure for detail.

For FOM and 1FOMA cards:

■ Where **opt** is used to select optical module type (All optical modules are RoHS compliant):

opt =	Description	Note
NHB3S (was SAA)	Single optical module with dual uni-directional fiber, 1310 nm, SC optical connector, 30 km - S1.1	<ul style="list-style-type: none"> • Use dual fiber • Units delivered ITU-T G.957 application code
NHB5S (was SBB)	Single optical module with dual uni-directional fiber, 1310 nm, SC optical connector, 50 km - L1.1	<ul style="list-style-type: none"> • Use dual fiber • Units delivered ITU-T G.957 application code
NHB3F (was SCC)	Single optical module with dual uni-directional fiber, 1310 nm, FC optical connector, 30 km - S1.1	<ul style="list-style-type: none"> • Use dual fiber • Units delivered ITU-T G.957 application code
NHC2S (was SDD)	Single optical module with dual uni-directional fiber, 1550 nm, SC optical connector, 20 km - S1.2	<ul style="list-style-type: none"> • Use dual fiber • Units delivered ITU-T G.957 application code <p> For the orders of the listed optical modules, please contact your Loop sales representative.</p>
NHCUS (was SEE)	Single optical module with dual uni-directional fiber, 1550 nm, SC optical connector, 100 km - L1.2	<ul style="list-style-type: none"> • Use dual fiber • Units delivered ITU-T G.957 application code
WHD2S (was SSM)	Single optical module with single bi-directional fiber (master), 1310 nm transmit and 1550 receive, SC optical connector, 30 km - S1.1/S1.2	1310 nm from master to slave Order SSM to use with SSS Use 1 fiber ITU-T G.957 application code
WHE2S (was SSS)	Single optical module with single bi-directional fiber (slave), 1310 nm receive and 1550 transmit, SC optical connector, 30 km - S1.1/S1.2	1550 nm from slave to master Order SSS to use with SSM Use 1 fiber ITU-T G.957 application code

Note: For other special optical modules, please contact your nearest Loop sales representative.

For 6CDA card:*

■ Where **cdm** is used for co-directional/contra-directional mode selection. Must select one from table below.

cdm=	Description	Note
cc	Supports G.703 Contra-directional controlling (DCE) and Co-directional interface configuration	
cs	Supports G.703 Contra-directional subordinate (DTE) and Co-directional interface configuration	
mixed	Supports G.703 Contra-directional controlling (DCE), Contra-directional subordinate / Centralized (DTE) and Co-directional interface configuration	

*Future Option

For 8UDTEA card:

■ Where **opm** is to select 8UDTEA functions:

opm	Description
DCE	Support RS232/RS422/RS485 DCE interface which is software configurable
TS	Support Terminal Server Function and DCE
OMNI	Support Omnibus Function and DCE

CPT	Support Clock Pass Through function and DCE
TSOMNI	Support Terminal Server, Omnibus Function and DCE
HD	Support RS232/RS422/RS485 DCE interface with Full- and Half-Duplex modes
TSHD	Support Terminal Server Function and DCE with Full- and Half-Duplex modes
OMNIHD	Support Omnibus Function and DCE with Full- and Half-Duplex modes
TSOMNIHD	Support Terminal Server, Omnibus Function and DCE with Full- and Half-Duplex modes
FULL	Support Terminal Server, Omnibus Function, Clock Pass Through and DCE with Full- and Half-Duplex modes
Feature Activation License	Description
Loop-AM3440-8UDTEA-TSLIC	Feature Activation License for AM3440 8UDTE card to support Terminal Server function
Loop-AM3440-8UDTEA-OMNILIC	Feature Activation License for AM3440 8UDTE card to support Omnibus function
Loop-AM3440-8UDTEA-CPTLIC	Feature Activation License for AM3440 8UDTE card to support Clock Pass Through function
Loop-AM3440-8UDTEA-TSOMNLIC	Feature Activation License for AM3440 8UDTE card to support Terminal Server function and Omnibus function
Loop-AM3440-8UDTEA-HDLIC	Feature Activation License for AM3440 8UDTE card to support Full- and Half-Duplex modes
Loop-AM3440-8UDTEA-TSHDLIC	Feature Activation License for AM3440 8UDTE card to support Terminal Server function with Full- and Half-Duplex modes
Loop-AM3440-8UDTEA-OMNIHDLIC	Feature Activation License for AM3440 8UDTE card to support Omnibus function with Full- and Half-Duplex modes
Loop-AM3440-8UDTEA-TSOMNIHDLIC	Feature Activation License for AM3440 8UDTE card to support Terminal Server function and Omnibus function with Full- and Half-Duplex modes
Loop-AM3440-8UDTEA-FULLLIC	Feature Activation License for AM3440 8UDTE card to support Terminal Server, Omnibus and Clock Pass Through functions with Full- and Half-Duplex modes

For Quad E&M A card:

■ Where **wr** is used to select wire type:

wr =	Description	Note
2w	2 wire	
4w	4 wire	

■ Where **m** is used to select QEM card signaling side (must select one):

m =	Description	Note
B	B (carrier side) connects to A side.	
A	A (exchange side) connects to B side. A side M lead to B side M lead, A side E lead to B side E lead.	

■ Where **n** is used to select QEM card signaling type (must select one):

n =	Description	Note
0	For voice transmission only.	Circuit Type doesn't matter.
1	Type I (Original) E&M Signaling Circuit	M lead provides discharge for the A side.
2	Type II Circuit. This design attempts to reduce ground noise by adding two leads: SB (Signal to Battery) and SG (Signal to Ground)	Reduced ground noise. Ground current is eliminated at the cost of two more wires per circuit.
3	Type III Circuit. The SG lead serves as a discharge for the M lead. Reduces delay caused by combination of (a) low current electronic detectors, and (b) long runs of the E and M leads.	Type III is rare because ground currents on the E return would cause noise
4	Type IV Circuit. Based on the Type 2 circuit. This E&M circuit provides symmetry.	
5	Type V Circuit. For applications where ground noise is not an issue. Based on the Type 2 circuit.	

For voice cards (8EMA, QEMA, and QFXSA):

■ Where **x** is used to select all of voice card signaling bits. If this option is not required, omit the **x** field in the ordering code.

	x =	Description	Note
8EMA	E	Follows ETSI signaling bits	Jumper selectable for all channels
	A	Follows ANSI signaling bits	
	R	Reverse for ON-HOOK and OFF-HOOK signaling bits exchange	
	AR	Follows ANSI signaling bits and reverse bit	
	S	Follows customer's special bit or function assignment	
	S4	Disable the function of the test button	
	S5	Forcing all ports to be OFF-HOOK when an alarm occurs	
	S6	Forcing all ports to be ON-HOOK when an alarm occurs	
	x =	Description	Note
QEMA	A	Follows ANSI signaling bits	Jumper selectable for all channels.
	E	Follows ETSI signaling bits	
	S	Follows customer's special bits assignments	
	x =	Description	Note
QFXSA	A	Follows ANSI signaling bits	■ This option applies to controller version v8.36.XX and before. ■ If this option is not required, omit the x field in the ordering code.
	E	Follows ETSI signaling bits	
	S	Follows customer's special bits assignment	

Note:

- For S (customer's special bit), please contact your nearest Loop sales representative.
- If x is not selected from table above, the default setting for signaling bits is ETSI and for trunk condition is ON-HOOK.

For 8EMA card:

■ Where **pt** is used to select the following functions:

pt=	Description	Note
24	For AM3440-A-CHPAa using SDPA power module with ± 24 Vdc input power	For CHPAa chassis only
PWR	For AM3440-A-CHPAa using SDPA power module with ± 48 Vdc input power or using SDP125 power module with ± 125 Vdc input power	
PWRIE1613	For AM3440-A-CHPAa using SDPA power module with ± 48 Vdc input power, complied with IEEE1613 standard	

■ Where **typ** is used to select the connector type:

typ=	Description	Note
RJ	8 x RJ45	
TELCO	1 x Telco 64 Connector	

For 12FXSA card:

■ Where **sn** is used to select special function. If this option is not required, omit the **sn** field in the ordering code.

sn =	Description	Note
sn = omit	FXS Loop Feed = -48 Vdc with 25 mA current limit; alarm tone enable; normal ring	
S1	FXS Loop Feed = -48 Vdc with 35 mA current limit	
S4	Remove alarm tone	
S5	Double ring tone transmit	

Note: For sn (special function), please contact your nearest Loop sales representative.

- Where **pta** is used to select the following functions.

pta=	Description	Note
24	For AM3440-A-CHPAa using SDPA power module with $\pm 24\text{Vdc}$ input power	For CHPAa chassis only
PWR	For AM3440-A-CHPAa using SDPA power module with $\pm 48\text{Vdc}$ input power or using SDP125 power module with $\pm 125\text{Vdc}$ input power	

- Where **typ** is used to select the connector type:

typ=	Description	Note
RJ	8 x RJ45	
TELCO*	1 x Telco 64 Connector	

*Future Option

For 12FXOA/12MAGA cards:

- Where **typ** is used to select the connector type:

typ=	Description	Note
RJ	12 x RJ11	
TELCO	1 x Telco 64 Connector	

For ODP card:

- Where **typ** is used to select the connector type:

typ=	Description	Note
RJ	8 x RJ48S	
TELCO	1 x Telco 64 Connector	

For QFXSA card:

- Where **pt** is used to select the following functions.

pt=	Description	Note
24	For AM3440-A-CHPAa using SDPA power module with $\pm 24\text{Vdc}$ input power	For CHPAa only
PWR	For AM3440-A-CHPAa using SDPA power module with $\pm 48\text{Vdc}$ input power or SDP125 power module with $\pm 125\text{Vdc}$ input power.	

For C37.94 card:

- Where **LSFOM** is to select **LS-Fiber Optical Module** option, please replace **LSFOM** with your selection.

Where LSF OM is to select DS Fiber Optical Module Option, please replace LSF OM with your selection.											
LSFOM	Description										Note
Code	Mode		Data Rate		Wave Length		Distance		Connector/Interface		
	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	
ZRATT	Z	Multi-mode	R	2 M	A	820nm	T	2km	T	ST/UPC	
QRATT	Q	Multi-mode	R	2 M	A	850nm	T	2km	T	ST/UPC	
NRB2T	N	Single-mode	R	2 M	B	1310nm	2	20km	T	ST/UPC	
T	Single mode, 1310nm, Tx_min -13dBm, Rx_max -30dBm, SC type connector. Works with Toshiba teleprotection device in direct mode.										Must use 3 x DS0
S	Single mode,1310nm, Tx_min -14dBm, Rx_max -36dBm, ST type connector Works with SEL teleprotection device in direct mode.										Must use 8 x DS0
GE	Single mode, 1310nm, Tx_min -15dBm, Rx_max -34dBm, ST type connector. Works with GE teleprotection device in direct mode.										Must use 12 x DS0

I	Single mode, 1310nm, Tx_min -5dBm, Rx_max -30dBm, SC type connector. Works with Ingeteam teleprotection device in direct mode.	Must use 3 x DS0
---	---	---------------------

■ SFP module for Loop-AM3440-4C37SFPA-G

Code	Description										Note
	Mode		Data Rate		Wave Length		Distance		Connector		
	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	
MRPTD	M	Multi-Mode	R	2 M	P	850nm	T	2km	D	LC connector with DDM	SFP Module
PRB2D	P	Single-Mode	R	2 M	B	1310nm	2	20km	D	LC connector with DDM	SFP Module

For mini C37.94 card:

■ Where **LSFOM** is to select **LS-Fiber Optical Module** option, please replace **LSFOM** with your selection.

LSFOM	Description										Note
	Mode		Data Rate		Wave Length		Distance		Connector/ Interface		
	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	
ZRATT	Z	Multi-mode	R	2 M	A	820nm	T	2km	T	ST/UPC	
QRATT	Q	Multi-mode	R	2 M	A	850nm	T	2km	T	ST/UPC	
NRB2T	N	Single mode	R	2 M	B	1310nm	2	20km	T	ST/UPC	

For Transfer Trip (TTA) card:*

■ Where **pwr** is used to select the following functions.

pwr=	Description	Note
24	Complied with 24/48V voltage	
48	Complied with 48/125V voltage	
125	Complied with 125/250V voltage	

For 8GEAa card:*

■ Where **typ** is used to select the connector type:

typ=	Description	Note
RJ	8 x 10/100/1000BaseT RJ45	
SFP	8 x SFP optical ports (SFP not included)	

*Future Option

Ordering Examples

Loop-AM3440-A-CHPAa, Loop-AM3440-CCPB-8GEHSWa, Loop-AM3440-SDPA, Loop-AM3440-3RS232a, Loop-AM3440-8GEAa-SFP:

For AM3440-A-CHPA type-a chassis with a CPU card, a single -48 Vdc power module, a 3-port RS232 interface with DB44 connector, and an 8-port GbE interface plug-in module with SFP housing.

Loop-AM3440 Access DCS-MUX Product Specifications

AM3440-CCPB-8GEHSWa Controller

Number of GE Ports	8 SFP
Speed	4 ports 1000Mbps and 4 ports 100/1000Mbps
Operating Temperature	-20~55°C

Ethernet Function

Basic Features	Dual rate SFP with autodetection Ping function contained ARP
----------------	---

Circuit Emulation

Concurrent PW	Up to 64
SAToP	Unframed E1/T1 packets
CESoPSN	Fractional E1/T1 (N x DS0) packets

Clock Source

Internal, Line Interface, External (E1/T1/2048 KHz from CLKa/CLKb*/CLKc* module, 1PPS/TOD from CLKc*), Adaptive Clock Recovery for Pseudowires, SyncE

Alarm Relay

Max. Current: 1A for 24VDC, 0.625A for 48VDC
Fuse alarm, performance alarm from CLKa/CLKb* module

Encapsulation

TDM	Over MPLS, over Carrier Ethernet, over IP (using pseudowire)
IP	Over MPLS (using pseudowire)
Ethernet	VPWS, VPLS (using pseudowire)

QoS

Eight priority queues
Scheduling – Strict Priority, Weighted Round Robin with hierarchy
Ingress policing per service
Egress shaping per service
CIR / PIR (EIR) Two-rate, three-color. (committed information rate, peak or expected information rate)
E-LSP: EXP-Inferred PSC (Per Hop Behavior Scheduling Class), LSP (label switching path)
WRED for congestion management. (weighted random early detection)

Management

Console	DB9S(DCE), female, RS232 connector Micro USB connector User Interface: Menu driven VT-100
Ethernet	GE port, Connector: RJ45 SNMPv1/v3, Telnet/SSH, support Radius client function Web GUI support (optional)
Inband Management	Inband 64 Kbps, support HDLC/PPP

System Configuration Parameters

Active Configuration, Stored Configuration, and Default Configuration (Stored in Non-volatile Memory)
Configuration Upload/Download through TFTP/SFTP

Performance Monitor

Performance Registers	Last 24 hours performance in 15 minute intervals and last 7 days in 24 hour summaries
Separate Registers	Network, user, and remote site
Performance Reports	Reports include E1 Bursty Errored Second, Severe Errored Second, Degraded Minutes. Also available in Statistics (%)
Alarm Queue	To record the latest alarm type, location, date and time
Threshold	Bursty Seconds, Severely Errored Second, Degraded Minutes

Diagnostics

Loopback	E1/T1 interface (Line Loopback, Payload Loopback, Local Loopback), DTE Loopback (DTE-to-DTE, DTE to Line)
Test Pattern	For Controller: 2 ²⁰ -1, 2 ¹⁵ -1, 2 ¹¹ -1, 2 ⁹ -1, and 4-byte user define pattern

Front Panel

Controller LED Indicators Power, ACTIVE, ALARM

Standards Compliance

IEEE

RFC (IETF)*

802.1d	STP	2131 & 2132	DHCP
802.1w	RSTP	6378	MPLS-TP Linear Protection
802.1s	MSTP	1058	RIPv1
802.1q	VLAN	1389	RIPv2
802.1ad	Tag Stacking (Q-in-Q)	2328	OSPFv2
802.3ag	Ethernet OAM	5340	OSPFv3
802.3ah	Ethernet in the First Mile	3895	Pseudowire End-to-end Emulation (PWE3)
1588 v2*	Precision Time Protocol		

ITU

G.8113.2*	MPLS-TP OAM
Y.1731	Ethernet OAM
G.8031	ELPS
G.8032	ERPS

*Future Option

AM3440-CCPB-2GEa Controller

Number of Ports	2
Speed	10/100/1000M bps
Connector	RJ45 for twisted pair GbE, LC for optical GbE, auto detection

Ethernet Function

Basic Features	MDI/MDIX for 10/100/1000M BaseT auto-sensing Ping function contained ARP
----------------	---

Pseudowire

Concurrent PW	Up to 64
Encapsulation Format	SAToP, CESoPSN, MEF-8 (CESoETH)
QoS	User configurable 802.1p CoS, ToS in out-going IP frame

Clock Source

Internal, Line Interface, External (E1/T1/2048 KHz from CLKa/CLKb* module), Adaptive Clock Recovery for Pseudowires, SyncE

Alarm Relay

Max. Current: 1A for 24VDC, 0.625A for 48VDC
Fuse alarm, performance alarm from CLKa/CLKb* module

Management

Console	DB9S(DCE), female, RS232 connector Micro USB connector User Interface: Menu driven VT-100
Ethernet	2 Combo (RJ45 & SFP) GbE port SNMPv1/v3, Telnet/SSH, support Radius client function Web GUI support (optional)
Inband Management	Inband 64 Kbps, support HDLC/PPP

<u>System Configuration Parameters</u>	Active Configuration, Stored Configuration, and Default Configuration (Stored in Non-volatile Memory) Configuration Upload/Download through TFTP/SFTP
---	--

Performance Monitor

Performance Registers	Last 24 hours performance in 15 minute intervals and last 7 days in 24 hour summaries
Separate Registers	Network, user, and remote site
Performance Reports	Reports include E1 Bursty Errored Second, Severe Errored Second, Degraded Minutes. Also available in Statistics (%)
Alarm Queue	To record the latest alarm type, location, date and time
Threshold	Bursty Seconds, Severely Errored Second, Degraded Minutes

Diagnostics

Loopback	E1/T1 interface (Line Loopback, Payload Loopback, Local Loopback), DTE Loopback (DTE-to-DTE, DTE to Line)
Test Pattern	For Controller: 2 ²⁰ -1, 2 ¹⁵ -1, 2 ¹¹ -1, 2 ⁹ -1, and 4-byte user define pattern

Front Panel

Controller LED Indicators	Power, ACTIVE, ALARM
---------------------------	----------------------

*Future Option

AM3440-CCPB-DCSa ControllerClock Source

Internal, Line Interface, External (E1/T1/2048 KHz from CLKa/CLKb* module)

Alarm Relay

Max. Current: 1A for 24VDC, 0.625A for 48VDC

Fuse alarm, performance alarm from CLKa/CLKb* module

Management

Console

DB9S(DCE), female, RS232 connector

Micro USB connector

User Interface: Menu driven VT-100

Ethernet

RJ45 port

SNMPv1/v3, Telnet/SSH

Web GUI support (optional)

Inband Management

Inband 64 Kbps, support HDLC/PPP

System Configuration Parameters

Active Configuration, Stored Configuration, and Default Configuration (Stored in Non-volatile Memory)

Configuration Upload/Download through TFTP/SFTP

Performance Monitor

Performance Registers

Last 24 hours performance in 15 minute intervals and last 7 days in 24 hour summaries

Separate Registers

Network, user, and remote site

Performance Reports

Reports include E1 Bursty Errored Second, Severe Errored Second, Degraded Minutes. Also available in Statistics (%)

Alarm Queue

To record the latest alarm type, location, date and time

Threshold

Bursty Seconds, Severely Errored Second, Degraded Minutes

Diagnostics

Loopback

E1/T1 interface (Line Loopback, Payload Loopback, Local Loopback), DTE Loopback (DTE-to-DTE, DTE to Line)

Test Pattern

For Controller: 2²⁰-1, 2¹⁵-1, 2¹¹-1, 2⁹-1, and 4-byte user define patternFront Panel

Controller LED Indicators Power, ACTIVE, ALARM

*Future Option

Physical /Electrical

Model		AM3440-A-CHPAa
Dimensions		442 x 222.5 x 223.5 mm (W×H×D)
Power		Single/ Dual -24Vdc/-48 Vdc: -18 to -75 Vdc, 150 Watts max. Single/ Dual -125 Vdc: -80 to -150 Vdc, 250 Watts max.
Temperature	Operating	-20 to 65°C
	Storage	-30 to 70°C
Weight	Net Weight	5.0Kg (11.02lbs)
	Max. Weight	10.0 Kg (22.05lbs)
Humidity		0-95%RH (non-condensing)
Mounting		Desk-top stackable, 19" /23" rack mountable
Power Consumption		Max 110 Watts

Certification

EMI/EMC	EN55032 Class A, EN55035, BS EN55032 Class A, BS EN55035, FCC Part 15 Class A, FCC Part 68, CS-03
Safety	EN62368-1, BS EN 62368-1, UL 62368-1
UL94 Flame Class	UL94V-0

ComplianceITU G.703, G.704, G.706, G.732, G.736, G.823, G.826, G.711, G.712, G.775, O.151, Q552, Q553, V.11, V.28, V.54
IETF SNMP v.3 (RFC2571~2575), ITU-T Rec.G.821, ITU-T Rec.G.827Loop-VV Y-BOXLINE

Connector BNC or RJ48C

Port Number For Y-BOX with BNC connectors: 4 line ports

For Y-BOX with RJ48C connectors: 16 line ports

Protection For Y-BOX with BNC connectors: support 2 Quad E1 or 2 mini Quad E1(75ohm) plug-in cards, 4 active

E1, 4 standby E1

For Y-BOX with RJ48C connectors: support 8 Quad E1 or 8 mini Quad E1(120ohm) plug-in cards, 16 active E1, 16 standby E1

For Y-BOX with RJ48C connectors: support 8 Quad T1 or 8 mini Quad T1 plug-in cards, 16 active T1, 16 standby T1

Mechanical

Height	44.5 mm/ 1.75 in
Width	432 mm/ 17 in
Depth	100 mm/ 3.9 in

Transportation Cards

Network Line Interface - T1

Line Rate	1.544 Mbps \pm 32ppm	Output Signal	DSX1w/0, -7.5, -15 dB LBO
Line Code	AMI or B8ZS	Framing	ESF, ESF&T1.403, G.802, D4
Input Signal	DSX-1 0 dB to -30 dB w/ALBO	Connector	RJ48C

Network Line Interface - E1

Line Rate	2.048 Mbps \pm 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	BNC/RJ48C
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823

Network Line Interface - Mini 4E1

Line Rate	2.048 Mbps \pm 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	DB25S
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823

Network Line Interface - Mini 4T1

Line Rate	1.544 Mbps \pm 32 ppm	Framing	ESF, ESF&T1.403, None, D4
Line Code	AMI/B8ZS	Connector	DB25S
Input Signal	ITU G.703 DSX-1 0dB to -30dB w/ALBO	Output Signal	ITU G.703 DSX-1 w/o, -7.5, -15dB LBO ITU G.703 DSX-1 w/short (0-110, 110-220, 220-330, 330-440, 440-550, 550-660 feet)
Jitter	AT&T TR 62411	Pulse Template	AT&T TR 62411
Data Rate	n * (64) Kbps (n=1-24)		

Network Line Interface - 3E1

Line Rate	2.048 Mbps \pm 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	BNC/RJ48C
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823
Function	Support DS0-SNCP circuit level protection		

Network Line Interface - 3T1

Line Rate	1.544 Mbps \pm 32 ppm	Framing	D4/ESF
Line Code	AMI/B8ZS	Output Signal	DSX-1 w/0, -7.5, -15dB LBO
Input Signal	DSX-1 0dB to -30dB w/ALBO	Connector	RJ48C
Jitter	AT&T TR 62411	Pulse Template	AT&T TR 62411
Data Rate	N * (64) Kbps (n = 1 to 24)	Surge Protection	FCC Part 68 Sub Part D

Network Line Interface - 4E1

Line Rate	2.048 Mbps \pm 50 ppm	Framing	ITU G.704
Line Code	AMI or HDB3	Connector	BNC/RJ48C
Input Signal	ITU G.703	Electrical	75 ohm Coax/120 ohm twisted pair
Output Signal	ITU G.703	Jitter	ITU G.823

Network Line Interface - 4T1

Line Rate	1.544 Mbps \pm 32 ppm	Output Signal	DSX1w/0, -7.5, -15 dB LBO
Line Code	AMI or B8ZS	Framing	ESF, ESF&T1.403, None, D4
Input Signal	DSX-1 0 dB to -30 dB w/ALBO	Connector	RJ48C

Fiber Optical Interface (FOM, 1FOM-A)

Source	MLM Laser	Line Code	Scrambled NRZ
Wavelength	1310 ± 50 nm, 1550 ± 40 nm	Detector Type	PIN-FET
50 Km reach		Protection	Optional 1+1 APS

NOTE: Longer or shorter, 15 to 120Km, on special order.

Optical Module	Fiber Direction	Wavelength (nm)	Connector/Interface	Distance (km)	Power (dB)
NHB3S (was SAA)	Dual uni-direction	1310	SC/UPC	30	19
NHB5S (was SBB)	Dual uni-direction	1310	SC/UPC	50	30
NHB3F (was SCC)	Dual uni-direction	1310	FC/UPC	30	20
[^] NHC2S (was SDD)	Dual uni-direction	1550	SC/UPC	20	12
NHCUS (was SEE)	Dual uni-direction	1550	SC/UPC	100	30
WHD2S (was SSM)	Single bi-direction (master)	1310/1550	SC/UPC	30	20
WHE2S (was SSS)	Single bi-direction (slave)	1310/1550	SC/UPC	30	20

NOTE: Other fiber optical options available on special order

[^] For the orders of the listed optical module, please contact your Loop sales representative.

TDMoEA***Combo Gigabit Ethernet (GbE) Interface**

Number of Ports	2
Speed	10/100/1000M bps
Connector	RJ45 for twisted pair GbE, LC for optical GbE, auto detection

Gigabit Ethernet (GbE) Interface

Number of Port	2
Speed	10/100/1000 BaseT
Connector	RJ45

Ethernet Function

Basic Features	MDI/MDIX for 10/100/1000M BaseT auto-sensing Ping function contained ARP
Packet Transparency	Packet transparency support for all types of packet types including IEEE 802.1q VLAN and 802.1ad (Q-in-Q)
QoS	User configurable 802.1p CoS, ToS in out-going IP frame
Traffic Control	Ingress packet Rate limiting buckets per port for Ethernet port Supporting Rate-based and Priority-based rate limiting for LAN port Granularity: a. From 64 Kbps to 1 Mbps in increments of 64 Kbps b. From 1 Mbps to 100 Mbps in increments of 1 Mbps c. From 100 Mbps to 1000 Mbps in increments of 10Mbps Pause frame issued when the traffic exceeding the limited rate before packet dropped following IEEE802.3X
Link Aggregation	WAN supports Link Aggregation

Jitter & Wander

PPM: per G.823 Traffic

Standards Compliance

IEEE		IETF	
802.1d	MAC Table Learning and STP	RFC2236	IGMP Snooping v2*
802.1p	Priority Code Point		
802.1q	VLAN	RFC2495	E1/T1 OAM

802.1s	MSTP*		
802.1w	RSTP		
802.1ad	Tag Stacking (Q-in-Q)	RFC 4553	SAToP
802.3ad	Link Aggregation	RFC 5086	CESoPSN
		ITU	
MEF		G.823/G.824	Traffic Interface
8	CESoETH		

Certifications

EMC	EN55022 Class A, EN50024, FCC Part 15 Subpart B Class A
Safety	EN60950-1(CE)

* Future Option

G.SHDSL Line Interface

Number of Ports	2 or 4
Data Rate for 4-channel G.shdsl	n x 64Kbps (n= 3 to 32)
Data Rate for 2-channel G.shdsl	n x 64Kbps (n= 3 to 16)
Line Code	16-TCPAM, full duplex with adaptive echo cancellation
Connector	RJ45
Electrical	Unconditioned 19-26 AWG twisted pair
Sealing Current	Max. 20 MA source current
Clock Source	From System, Line
Diagnostic Test	G.SHDSL Loopback: To-LINE, To-bus BERT: QRSS

Packet AccessRouter-A Interface

Number of Ports	2 LAN ports, Max. 64 WAN ports, Each WAN port has data rate n x 64K bps, $1 \leq n \leq 32$ (≤ 4 Mbps for total of all 64 WAN ports)
Physical Interface	10/100 BaseT x 2
Connector	RJ45
Routing protocol	RIP-I, RIP-II, OSPF, Static
Supporting Protocols	PPP (IPCP/BCP), MLPPP, HDLC, Frame Relay, and Cisco compatible HDLC, NAT/NAPT, DHCP
Diagnostic	Ping, Trace route
QoS	Rate limit

Router-B Interface

Number of Ports	8 LAN ports, Max. 64 WAN ports. Each WAN port has data rate n x 64K bps, $1 \leq n \leq 32$ (≤ 8 Mbps for total of all 64 WAN ports)
Physical Interface	10/100 BaseT x 8
Connector	RJ45
Routing protocol	RIP-I, RIP-II, OSPF, Static
Supporting Protocols	PPP (IPCP/BCP), MLPPP, HDLC, Frame Relay, and Cisco compatible HDLC, NAT/NAPT, DHCP
Diagnostic	Ping, Trace route
QoS	Rate limit, Policy based Diffserv/DSCP
VLAN Q-in-Q	IEEE 802.1ad

Serial and Digital AccessDTE Interface (X.21)

Data Port	1 port
Data Rate	56 or 64 Kbps, n = 1 to 32
Connector	DB15S

DTE Interface (V.35)

Data Port	1 port
Data Rate	56 or 64 Kbps, n = 1 to 32
Connector	DB25S (optional conversion cable DB25S to M34 connector)

DTE Interface (RS232/V.24)

Data Port	1 port
Data Rate	56 or 64 Kbps *n, n=1 - 2
Mapping	Any sequential time slots

DTE Interface (RS232-X.50 mux. 8-port)

[EYE Monitor \(RS232\) also max. 8 ports](#)

Data Port	Up to 8-port RS232 cards							
MUX	Maximum 5 subrate port per 64K bps							
Data Rate	Asynchronous	Mux mode		0.6K, 1.2K, 2.4K, 4.8K, 9.6K				
		Independent mode		0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K				
	Synchronous	Mux mode		0.6K, 1.2K, 2.4K, 4.8K, 9.6K				
		Independent mode		0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, 48K, 64K				
Card Type	Port Number							
	1	2	3	4	5	6	7	8
Eight RJ48	Async/	Async/	Async	Async/	Async/	Async	Async	Async
	Sync <small>Note 1</small>	Sync <small>Note 1</small>		Sync <small>Note 1</small>	Sync <small>Note 1</small>			
Two DB44 + Two RJ48	Async/Sync	Async/Sync	Async	Async/Sync	Async/Sync	Async	Async	Async
Connector	Eight RJ48 (port 1 to port 8) DB44 (port1,port2,port3), DB44 (port4,port5,port6), RJ48 (port7) and RJ48(port8)							
Conversion Cable	A three-into-one conversion cable adapts the DB44 connector to 3 connectors (one DB9S and two DB25S)							
Electrical	RS232 Interface, DCE							

Note 1: Sync- with rate up to 19.2 Kbps achieved by oversampling at 64 Kbps

DTE Interface (RS232 with V.110 encoding, 6-port)

<u>DTE interface (RS232 with V.110 encoding, 5 port)</u>						
Data Port	Up to 6 ports					
MUX	Maximum 6 subrate port / 64Kbps					
Protocol	Supports V.110					
Data Rate	Asynchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K			
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K			
	Synchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K,			
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, 48K, 64K			
Card Type	Port Number					
	1	2	3	4	5	6
RJ48	Async	Async	Async	Async	Async	Async
DB44	Sync/Async	Sync/Async	Async	Sync/Async	Sync/Async	Async
Connector	DB44 (port1,port2,port3) DB44 (port4,port5,port6) or RJ48 (port 1 to Port 6 are 6RJ48)					
Alarm	Remote Alarm RTS Loss					
Loopback	To-DTE To-DS1 (To Line)					
Electrical	RS232 Interface, DCE					

DTE Interface (RS232 with V.110 encoding, 3-port)

Data Port	Up to 3 ports				
MUX	Maximum 3 subrate port / 64Kbps				
Data Rate	Asynchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 7.2K**, 9.6K, 14.4K**, 19.2K		
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 7.2K**, 9.6K, 14.4K**, 19.2K, 38.4K		
	Synchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 7.2K**, 9.6K, 14.4K**, 19.2K		
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 7.2K**, 9.6K, 14.4K**, 19.2K, 38.4K, 48K, 64K		
Connector	DB44				
	Port Number				
DB44	1	2		3	
	Sync/Async		Sync/Async		Async
Alarm	Remote Alarm				
	RTS Loss				
Loopback	To-DTE (To Line)				
	To-DS1				
Electrical	RS232 Interface, DCE or DTE				

**proprietary transport mode for 7.2K and 14.4K data rate

Sub Rate Data (8SRU)*

Data Port	Up to 8 ports								
Data Rate	Asynchronous	Mux mode	0.3K, 1.2K, 2.4K, 4.8K, 9.6K, 14.4K, 19.2K, 28.8K, 38.4K						
		Independent mode	0.3K, 1.2K, 2.4K, 4.8K, 9.6K, 14.4K, 19.2K, 28.8K, 38.4K						
	Synchronous	Mux mode	2.4K, 4.8K, 9.6K, 19.2K, 28.8K, 38.4K, 48K, 64K						
		Independent mode	2.4K, 4.8K, 9.6K, 19.2K, 28.8K, 38.4K, 48K, 64K						
Port Number	1	2	3	4	5	6	7	8	
Card Type	Eight RJ48	Async	Async	Async	Async	Async	Async	Async	Async
	Two DB44 +	Async/	Async/	Async	Async/	Async/	Async	Async	Async
	Two RJ48	Sync	Sync		Sync	Sync			
Connector	DB44 (port1, port2, port3), DB44 (port4, port5, port6), RJ48 (port7), RJ48 (port8)								
	Eight RJ48 (port 1 to port 8)								
Conversion Cable	A three-into-one conversion cable adapts the DB44 connector to 3 connectors (one DB9S and two DB25S)								
Electrical	RS232 Interface, DCE								

*Future Option

6UDTEA Card**Mode 1: Sub-Rate mode****DTE Interface (RS232)**

Data Port	Up to 2		
MUX	Maximum 6 subrate port / 64Kbps		
Data Rate	Asynchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K
	Synchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K,
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, 48K, 64K
Connector	RJ48-ASYNC (Port5, Port6)		
Alarm	Remote Alarm		
	RTS Loss		
Loopback	To-DTE		
	To-DS1 (To Line)		
Electrical	DCE		
Protocol	V.110		

DTE Interface (X.21/RS232/RS422)

Data Port	Up to 4		
MUX	Maximum 4 subrate port / 64Kbps		
Data Rate	Asynchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K
	Synchronous	Mux mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K,
		Independent mode	0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, 48K, 64K
Connector	DB44 (Port1, Port2), DB44 (Port3, Port4)		
Alarm	Remote Alarm		
	RTS Loss		
Loopback	To-DTE		
	To-DS1 (To Line)		
Electrical	DCE		
Protocol	V.110		

Mode 2: N*64K Mode**DTE Interface (X.21/RS232/V.35/V.36/EIA530/RS449)**

Data Port	Up to 4 (Port 1 to 4)
Data Rate	Synchronous N*64kbps, N = 1 to 32
	Asynchronous mode is not supported.
Connector	DB44 (Port 1, Port 2), DB44 (Port 3, Port 4)
Alarm	RTS Loss
Loopback	To-DTE
	To-DS1 (To Line)
Electrical	DCE

Note: When oversampling is enabled in MODE2, port 5 ~ 6 will be disabled.

Mode 3: Hybrid ModeDTE Interface (X.21/RS232/V.35/V.36/EIA530/RS449)

Data Port	Up to 4 (Port 1 to 4)
Data Rate	Synchronous N*64kbps, N = 1 to 32 for port 1 ~ 3 ; N = 1 to 20 for port 4 Asynchronous mode is not supported.
Connector	DB44 (Port 1, Port 2), DB44 (Port 3, Port 4)
Alarm	RTS Loss
Loopback	To-DTE To-DS1 (To Line)
Electrical	DCE

DTE Interface (RS232)

Data Port	Up to 2 (Port 5 and Port 6)
MUX	Maximum 2 oversampling port
Data Rate	No Synchronous mode supported Asynchronous 200, 300, 0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K, 57.6K, 115.2K, 128K
Connector	RJ48 (Port 5, Port 6)
Alarm	Remote Alarm RTS Loss
Loopback	To-DTE To-DS1 (To Line)
Electrical	DCE

Mode 4: Clock Pass ThroughDTE Interface (X.21/RS449/RS422/RS232/V.35/V.36/EIA530)

Data Port	Up to 4 (Port 1 to 4)
Data Rate	Synchronous 0.6K, 1.2K, 2.4K, 4.8K, 9.6K, 19.2K, 38.4K Tx and Rx byte count
Connector	DB44
Alarm	LOLC, LOCH, CRE
Loopback	To-DTE, To-DS1 (To Line)
Electrical	DCE

Note: Port 5~6 are disabled in Mode 4.

Mode 5: N x 64K with Local and Remote LoopbackDTE Interface (X.21/RS449/RS422/RS232/V.35/V.36/EIA530)

Data Port	Up to 4 (Port 1 to 4)
Data Rate	Synchronous N*64kbps, N = 1~32
Connector	DB44
Protection	DTE signal duplicated via Y-box and transported by working and protection cards
Alarm	RTS Loss, FPGA fail
Diagnostics	DTE Loopback: To-DTE, To-DS1 (To Line) Local and Remote Loopback (except for X.21 interface) V.54 standard BERT
Electrical	DCE

Note: Port 5~6 are disabled in Mode 5.

8UDTEA CardRS232/RS422/RS485 Data Interface Function

Data Port	8 port Universal DTE card
ASYNCR Data Rate	200,300, 600, 1200, 2400, 4800, 9600, 19.2K, 38.4K, 57.6K, 115.2K, 128K bps by oversampling
Data Interface	RS232, RS485, RS422
Connector	RJ48C
Interface	DCE only

Terminal Server Function

Data Port	8 port Terminal Server
-----------	------------------------

ASYNCR Data Rate	600, 1200, 2400, 4800, 9600, 19.2K, 38.4K bps
Data Interface	RS232, RS485, RS422
WAN	64 WANs per card Bandwidth for each WAN is N x 64Kbps; N=1 to 32
IP Address	Up to 8 remote IP Address per port, when role is client
Router Function	RIP-I, RIP-II, Static Route
Stop bit	1 bit, 1.5 bit and 2 bit software configurable
Parity bit	None, Odd, Even
Data bit	5, 6, 7 and 8 bit.
Role	Server, Client
Data Buffer Size	1 to 2048 Byte
Data Buffer Time out	1 to 255 ms

Omnibus Function

Data Port	Eight ports per card
Asynchronous Data Rate	600, 1200, 2400, 4800, 9600, 19.2K, 38.4K bps
Data Interface	RS232, RS485, RS422
Synchronous	Not supported
Connector	RJ45C
Data Length	5, 6, 7, 8
Parity	None, Odd, Even
Stop Bit	1, 1.5, 2
Role	Master, Slave
Data Buffer Size	1~2048 Byte
Data Buffer Timeout	1~255 ms
Application	Daisy Chain, Star, Point to Multipoint

Clock Pass Through Function

Data Port	Eight ports per card
Synchronous Data Rate	600, 1200, 2400, 4800, 9600, 19.2K, 38.4K bps
Data Interface	RS232
Connector	RJ45C
Application	Pass through RS232 clock transparently for RADAR application

Flow Control

Hardware (RS232 only)	Oversampling: RTS and DTR Active and Permanent Omnibus: RTS Active and Permanent
Software	Terminal Server: Enable and Disable

Loopback

Loopback function	To DTE loopback To Local loopback
-------------------	--------------------------------------

LED Indicator

Multi LED indicators	ACT: green-power on; red-alarm exist TS: green-mode is terminal server X.50 (Omni): green-mode is omnibus Over Sampling: green-mode is over sampling
----------------------	---

OCU DP Interface Card

Number of Ports	1 port
Operating Modes	4-wire DDS or switched 56
Dedicated Rates	SYNC: 2.4, 4.8, 9.6, 19.2, 56 and 64k clear channel Conforms with AT&T Pub 41458
OCU DP Operation	Conforms with AT&T 62310 and ANSI T1.410
Local Loop Signal	Bipolar Return to zero, 50% duty cycle
Transmit Amplitude	+/- 1.5 V (+/- 10%) peak, all rates except 9.6k

Transmit Source Impedance	+/- 0.75 V (+/- 10%) peak at 9.6k
Receive Input Impedance	135 Ohms +/- 20%
Receiver Sensitivity/ Dynamic Range	0 to 43 dB loop loss at 72K & 56K
Physical Interface	0 to 34 all other rates 4-wire loop interface
Network to Loop Test Codes	RJ45 modular connector
Loop to Network Test Codes	Zero code suppression, Idle, out of service, UMC, MOS, TC, ABS, channel loopback, OCU and DSU loop-back
	Zero code suppression, Idle

8 Port OCU-DP Interface Card

Number of Ports	8 ports
Connector	Eight RJ48S or one Telco 64
Line Status Indicator	Per Port 1 dual color LED; Red for LOS, Green for SYNC
Electrical Network Connection	Tip/Ring and Tip1/Ring1
Transmit Source Impedance	135 Ohms +/-20%
Receive Input Impedance	135 Ohms +/-20%
Receiver Sensitivity	0 to 43 dB loop loss at 72K & 56K
Dynamic Range	0 to 34 all other rates Automatic line equalization
Pulse Amplitude	+/- 1.5V (+/-10%) peak, all rates except 9.6K +/-0.75 (+/-10%) peak at 9.6K
Sealing Current	Bipolar Return to zero, 50 duty cycle
Operating Modes	Typically 16mA DC 4-wire DDS
Circuit Rates	Switched 56 support is optional SYNC: 2.4, 4.8, 9.6, 19.2, 56, 72 kbps (64k) clear channel
Encoding and decoding rules	Conforms with AT&T Pub 41458 Use bipolar violation to indicate control information: Idle, out of service, Zero Substitution using unframed loops
Maintenance Control	DSU Non-latching loop-back code (for 2.4, 4.8, 9.6, 19.2, 56k circuit rate) DSU Latching loop-back (TIP, LSC, LBE, FEV) code (for 72k circuit rate)
	Machine maintenance OCU/DP card operation: Payload loopback OCU loopback Local loopback Bi-directional loopback V.54 remote loopback code Custom defined remote loopback code BERT test support all ones, all zeros, 2047,511,63 pattern.
Fault and Performance	LOS, OOS, ES, SES and UAS alarm. Current, last 96 registry and 7 days performance storage.
Environment	Operating: 0-50°C Storage: -25-75°C
Specification Standard	Humidity: Up to 90% RH non-condensing ANSI T1.410; AT&T Pub 62319, AT&T Pub 62310, ITU-T V.54

6CDA G.703 Interface Card*

Data Port Interface	6 ports cc mode : ITU G.703 64 Kbps co-directional and Contra-directional controlling (DCE) interface cs mode : ITU G.703 64 Kbps co-directional and Contra-directional subordinate / Centralized (DTE) interface mixed mode : ITU G.703 64 Kbps co-directional, Contra-directional controlling (DCE) and Contra-directional subordinate / Centralized (DTE) interface
Connector	120ohm, RJ48
Line Distance	Up to 500 meters
Alarm	Co-directional : LOS and insert AIS(All 1) Contra-directional : LOO (Loss Of Octet)
Loopback	DTE Payload Loopback, Local Loopback

1CD G.703 Co-directional

Data Port	1 port
Interface	ITU G.703 64 Kbps co-directional interface

Connector	120ohm, RJ48
Line Distance	Up to 500 meters
Loopback	DTE Payload Loopback, Local Loopback

Data Processing**Dry Contact Type B Interface**

Inputs -		Outputs -	
8-channel	2-port per card, 4-pair per port	8-channel	8-pair per card
Connector	RJ45	Connector	Screw type
Internal Resistance	100 K	Initial Insulation Resistance	Min. 1000M ohm (at 500 Vdc)
Activation Current	3 ma	Max. Current	2A
Deactivation Current	1.5 ma	Max. Voltage	220 Vdc, 250 Vac
Allowable Current	4 ma		

Dry Contact Type C Interface

Inputs -		Outputs -	
8-channel	2-port per card, 4-pair per port	8-channel	8-pair per card
Connector	RJ45	Connector	Screw type
Internal Resistance	1 K	Initial Insulation Resistance	Min. 100M ohm (at 500 Vdc)
Activation Current	3 ma	Max. Current	5A
Deactivation Current	1.5 ma	Max. Voltage	100 Vdc, 250 Vac
Allowable Current	4 ma	Short-circuit Current	5A
Input port	Provide 3.3V output		
Latency (from input to output)	10ms		

Echo Canceller Card

Echo Cancellation	64ms uni-directional, 64ms bi-directional and 128ms uni-directional
Channel	Up to 64 channels
Functions	- one way or bi-direction cancellation from PCM bus to ECA card - E1/T1 multichannel echo cancellation
PCM encoder/decoder	Compatible with ITU-T G.711 A-law/Mu-law coding.
LED Indicator	Multi-color indication
Compliant	ITU-T G.165 and ITU-T G.168-2000 and 2002

ABRA Card

Analog Bridge Mode	Group: up to 8 groups per card Master/Slave Architecture Downstream: 2 to many (up to 14 Slave units) Upstream: many to 2
Voice Conference Hotline Mode with CAS Signaling	Group: up to 8 groups per card Any-to-any conference bridge Up to 16 members in one conference group Silence detection/suppression
RS232 Data Bridge Mode	Group: up to 8 groups per card Master/Slave Architecture Downstream : 2 to many (up to 14 Slave units) Upstream: many to 2
OCU-DP Data Bridge Mode (MJU)	Group: up to 4 groups per card Master/Slave Architecture Downstream: 1 to many (up to 14 Slave units) Upstream: many to 1
Voice Protection Mode	Group: up to 42 groups per card One Master to two Slaves for 1+1 protection Analog signals only
PCM encoder/decoder	Compatible with ITU-T G.711 A-law/Mu-law coding
LED Indicator	Multi-color indication
1:1 Card Protection ^{NOTE}	Dual-card redundancy

Note: Supported by AM3440-CCB controller FW v11.14.02, CCPA controller FW v12.05.01, CCPB-2GEa controller FW v23.02.01, CCPB-DCSa controller FW V.13.05.01, CCPB-8GEHSWa controller FW v33.01.01 and up.

Data Bridge Card

Data Port	Up to 8 ports (each card supports up to 128 DS0 for data bridge function without protection)
Connector	8 RJ48C or 2 RJ48C + 2 DB44
Feature	20 end points per multi-drop circuit into a 56K or 64K channel (1 DS0) Each port supports bridge function to N remote Trib. Site (N=1 to 20)
Data Rate	Asynchronous: Support to receive 1200 to 19200 bps asynchronous data via oversampling channel
Bridge function	one port with one DS0 to many (Maximum is 20 for remote Tributary data box)
Protection	1+1 on adjacent ports, adjacent cards, or on different chassis Virtual Port 1 to Virtual Port 4 (1 to 128 DS0): 1+1 port Virtual Port 1 to Virtual Port 3 (1 to 96 DS0): 1+1 card Virtual Port 1 to Virtual Port 3 (1 to 96 DS0): Chassis+site Note: Each virtual port supports up to 32 DS0

Teleprotection Access**C37.94 Interface**SFP modules for **Loop-AM3440-4C37-LSFOM-G** and **Loop-AM3440-M1C37-LSFOM-G****ZRATT**

Multi-Mode, 2Mbps, 820nm, 2KM, ST/UPC connector

Tx						Rx						Note
Power (dBm)			Wavelength (nm)			Power (dBm)			Wavelength (nm)			
Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
-19.8	--	-12.8	792	820	865	-25.4	--	-9.2	792	820	865	
-16	--	-9				-25.4	--	-9.2				

QRATT

Multi-Mode, 2Mbps, 850nm, 2KM, ST/UPC connector

Tx						Rx						Note
Power (dBm)			Wavelength (nm)			Power (dBm)			Wavelength (nm)			
Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
-23	--	-11	790	--	870	-32	--	-11	790	--	870	
-19	--	-11				-32	--	-11				
												50/125µm Fiber Cable
												62.5/125µm Fiber Cable

NRB2T

Single-Mode, 2Mbps, 1310nm, 20KM, ST/UPC connector

Single mode, 2Mbps, 1550nm, 20km, SFP+ C connector												Note
Tx						Rx						
Power (dBm)			Wavelength (nm)			Power (dBm)			Wavelength (nm)			
Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
-20	--	0	1261	1310	1360	-32	--	0	1260	--	1610	

SFP modules for **Loop-AM3440-4C37SFPA-G**:**MRPTD**

Multi-Mode, 2Mbps, 850nm, 2KM, LC connector with DDM

Tx						Rx						Note
Power (dBm)			Wavelength (nm)			Power (dBm)			Wavelength (nm)			
Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
-23	--	-11	830	850	860	-32	--	-8	790	--	870	
-19	--	-11										
												50/125µm Fiber Cable
												62.5/125µm Fiber Cable

PRB2D

Single-Mode, 2Mbps, 1310nm, 20KM, LC connector with DDM

Tx												Rx				Note
Power (dBm)			Wavelength (nm)			Power (dBm)			Wavelength (nm)							
Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max					
-19	--	-11	1290	1310	1350	-32	--	-8	1260	--	1360					

Transfer Trip Card***Input**

Number of channels 4-channel : 4 pairs per card
 Input Connector Screw type
 Voltage Range 48/125V type

Output

Number of Channels 4-Channel: 4 pairs per card
 Output Connector Screw type
 Max Current 30A (200ms per C37.90)
 Max Voltage 280 Vdc
 Operation time 3ms

Alarm Relay

Maximum continuous current 1A (inductive)
 Maximum breaking current 1A (resistive)
 Maximum open circuit voltage 280 Vdc
 Maximum operation time 15ms

Environmental

Operating temperature -20°C to +60°C
 Humidity 5 - 95% non-condensing

Isolation

ANSI ANSI C37.90.1 SWC

EMI/RFI

ANSI ANSI C37.90.2

*Future Option

Voice and Analog Access**Voice Card (QEMA)**

Connector One 44-pin connector, adaptor cable included for 4 RJ45 connectors.
 Alarm Conditioning CGA busy after 2.5 seconds of LOS, LOF
 Encoding A-law or μ -law, user selectable as a group
 Impedance Balanced 600 or 900 Ω
 Gain Adjustment (Per-port setting) -10 to +7 dB / 0.1dB step for transmit (D/A) gain
 Gain Variation ± 0.5 dB at 0 dBm0 input
 Frequency Response ± 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712
 I/O Power Range A/D Analog input level: -66 dBm (0.00039 Vrms) ~ + 3 dBm (1.09 Vrms)
 D/A Analog output level: -66 dBm (0.00039 Vrms) ~ + 4 dBm (1.22 Vrms)

Longitudinal Balance	> 63dB
Longitudinal Conversion Loss	> 46dB
Total Distortion	> 35 dB at 0 dBm0 input
Idle Channel Noise	< -65 dBm0p
Wire Mode	2 wire and 4 wire
Signaling	Type I, Type II, Type III, Type IV, Type V, and TO (Transmission Only)
M Lead Output Current	18 mA (maximum)
E Lead Sensor Current	0.3 mA (minimum)
EM Type Setting	Jump Selectable
Relative Humidity	0% to 95%
Carrier Connection	Side A and side B setup by Jump

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.

Voice Card (8EMA)

Connector	Eight RJ45 or One Telco 64
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or μ -law, user selectable together for all
Impedance	Balanced 600 or 900 ohms
Gain Adjustment (Per-port setting)	-16 to +7 dB / 0.1dB step for transmit (D/A) gain -16 to +14 dB / 0.1dB step for receive (A/D) gain
I/O Power Range	A/D Analog input level: -66 dBm (0.00039 Vrms) ~ + 3 dBm (1.09 Vrms) D/A Analog output level: -66 dBm (0.00039 Vrms) ~ + 4 dBm (1.22 Vrms)
Gain Variation	± 0.5 dB at 0 dBm0 input
Frequency Response	± 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712
Longitudinal Conversion Loss	> 46dB
Total Distortion	> 35 dB at 0 dBm0 input
Idle Noise	< -65 dBm0p
Carrier Connection	Side A (exchange side) and Side B (carrier side) setup by side switch
Idle Channel Noise	Max. -65 dBm0p
Wire Mode	2 wire and 4 wire per card software programmable
Signaling	Type 1, Type 2, Type 3, Type 4, and Type 5, Transmit only (programmable)
Modems	Full compatibility with V.90 modems

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.

QMAGA (old crank-handle hot-line telephones), MRD (Manual Ring Down) Voice Card*

Connector	RJ11 x 4
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or μ -law, user selectable together for all
Impedance	Balanced 600 or 900 ohms (for magneto telephone impedance)
Longitudinal Conversion Loss	> 46dB
Gain Adjustment	-16 to +7 dB / 0.1dB step transmit gain (D-A) -16 to +13 dB/0.1dB step receive gain (A-D)
Signal/ Distortion	> 25dB with 1004 Hz, 0dBm input
Frequency Response	± 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712
Idle Channel Noise	Max. -65 dBm0p
<u>Signaling</u>	
Minimum Detectable Ringing Voltage	16 Vrms
Crank Detectable Across	L1 & L2 Mode (Tip and Ring), L1 & GND Mode(Tip and GND)
Crank Detected time	Valid crank: more than 250 ms Invalid crank: less than 160 ms
Ring Generation	Voltage: 76 Vrms (sine wave) Frequency: 25Hz
Ring duration	Software configurable options: 1. PLAR OFF Continuous Ring duration depends on cranking time

One Time

Crank the phone for one time, and the ring duration of the far-end phone could be 0.7, 1.0, 1.5 or 2.0 sec

2. PLAR ON

when FXS phone off-hooked, the ring duration of the far-end magneto phone could be 0.7, 1.0, 1.5 or 2.0 sec

L1 & L2 Mode (Tip and Ring), L1 & GND Mode(Tip and GND)

Turn Magneto Phone crank (Ringing across Tip and Ring or Tip and Ground)

Programable

Ringing Send Across
Signaling

Signaling Bit A,B,C,D

- Signaling is carried transparently by the digitizing process.
- Use Magneto card default setting (PLAR OFF) for communications between magneto telephones
- Use Magneto card PLAR ON mode setting for communications between a magneto telephone and a regular telephone
- PLAR stands for *Private Line Auto Ring down*.

12 MAGA (old crank-handle hot-line telephones), MRD (Manual Ring Down) Voice Card

Connector RJ11 x 12 or Telco64 x 1

Alarm Conditioning CGA busy after 2.5 seconds of LOS, LOF

Encoding A-law or μ -law, user selectable per card configurable

Impedance Balanced 600 or 900 ohms (for magneto telephone impedance)

Longitudinal Conversion Loss > 46dB

Gain Adjustment -21 to +7 dB / 0.1dB step transmit gain (D-A)

-21 to +13 dB/0.1dB step receive gain (A-D)

Signal/ Distortion > 25dB with 1004 Hz, 0dBm input

Frequency Response \pm 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712

Idle Channel Noise Max. -65 dBm0p

Signaling

Minimum Detectable Ringing Voltage 16 Vrms

Crank Detectable Across L1 & L2 Mode (Tip and Ring), L1 & GND Mode(Tip and GND) per port software programmable

Crank Detected time Valid crank: more than 250 ms

Invalid crank: less than 160 ms

Ringing Generation Voltage: 76 Vrms (sine wave)

Frequency: 25Hz

Ring duration Software configurable options:

1. PLAR OFF (Continuous Mode)

Ring duration depends on cranking time

2. PLAR OFF (One-time) Mode

Crank the phone for one time, and the ring duration of the far-end phone could be 0.7, 1.0, 1.5 or 2.0 sec

3. PLAR ON

When FXS phone off-hooked, the ring duration of the far-end magneto phone could be 0.7, 1.0, 1.5 or 2.0 sec

Ringing Send Across

L1 & L2 Mode (Tip and Ring), L1 & GND Mode(Tip and GND)

Signaling

Turn Magneto Phone crank (Ringing across Tip and Ring or Tip and Ground)

Signaling Bit A,B,C,D

Programable

- Signaling is carried transparently by the digitizing process.
- Use Magneto card default setting for communications between magneto telephones
- Use Magneto card PLAR mode setting for communications between a magneto telephone and a regular telephone

Voice Card (QFXOA)

Connector Four RJ11 connector

Alarm Conditioning CGA busy after 2.5 seconds of LOS, LOF

Encoding A-law or μ -law, user selectable together for all

AC Impedance Balanced 600 or 900 ohms (selectable together for all)

Longitudinal Conversion Loss > 46dB

Gain Adjustment -15 to +10 dB / 0.1dB step transmit & receive

Signal/ Distortion > 25dB with 1004 Hz, 0dBm input

Frequency Response \pm 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712

Idle Channel Noise	Max. -65 dBm0p
Variation of Gain	±0.5dB
FXO	Ringing REN 0.5B (AC)
	Detectable Ringing 25 Vrms
	Loop Resistance ≤ 1800 Ω
	DC Impedance (ON-HOOK) > 1M Ω
	DC Impedance(OFF-HOOK) 235 Ω @ 25mA feed
Signaling Bit A,B,C,D	Per-port configurable

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.

Voice Card (QFXSA)

Quad FXSA voice card (4 FXS per plug-in)

Connector	1, 2, 3, or 4 FXS per RJ11 connector
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or μ -law, user selectable
AC impedance	Balanced 600 or 900 ohms (user selectable)
Longitudinal Rejection	55 dB
Gain Adjustment	-21 to +3 dB / 0.1 dB step for transmit (D/A) & receive (A/D) gain
Signal/ Distortion	> 46dB with 1004 Hz, 0dBm input
Frequency Response	± 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712
Loop Feed	±48Vdc with 25mA current limit per port Jumper Selectable: 25mA, 30mA, 35mA
Ringing	Support 2 REN per port (1 REN = 6930Ω + 8 μ F) 16.7Hz, 20Hz, 25 Hz, 50Hz (user programmable) 64 / 78 Vrms by jumper setting (Default is 78 Vrms) 2 sec on 4 sec off, or 1 sec on 2 sec off optional for PLAR (user programmable) 12KHz/ 16KHz (2.4Vrm/1Vrm user programmable)
Metering Pulse Signaling	Loop Start (Metering Pulse, DTMF, Dialing Pulse, PLAR), GND-Start (Tip Open, Ring GND), OOS Alarm, Battery Reverse

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.

Voice Card (12FXSA, 12FXOA)

Connector	Twelve RJ11 or One Telco64
Alarm Conditioning	CGA busy after 2.5 seconds of LOS, LOF
Encoding	A-law or μ -law, user selectable together for all
AC Impedance	Balanced 600 or 900 ohms (selectable together for all)
Longitudinal Conversion Loss	> 46dB
Cross talk measure	Max -70dBm0
Gain Adjustment	FXS: -21 to +3 dB / 0.1dB step transmit & receive FXO: -21 to +10 dB / 0.1dB step transmit & receive
Signal/ Distortion	> 25dB with 1004 Hz, 0dBm input
Frequency Response	± 0.5 dB from 300 to 3400 Hz, coincide with ITU-T G.712
Idle Channel Noise	Max. -65 dBm0p
Variation of Gain	±0.5dB
FXO	Ringing REN 0.5B (AC)
	Detectable Ringing 25 Vrms
	Loop Resistance ≤ 1800 Ω
	DC Impedance (ON-HOOK) > 1M Ω
	DC Impedance (OFF-HOOK) 235 Ω @ 25mA feed ; 90 Ω @ 100mA feed
FXO Signaling Bit A,B,C,D	Per-port configurable
FXS Loop Feed	-48Vdc with 25mA current limit per port Jumper Selectable: 25mA(default=25mA), 30mA, or 35mA(sn=S1)
FXS Signalling	Normal / PLAR: Private Line Auto Ring down
FXS Ringing	1 REN at 5K meters per port 16.7Hz, 20Hz, 25Hz, 50Hz, user selectable for all ports Jumper selectable: 64, 76, and 85 Vrms (triangle wave), (default= 76 Vrms for Ring Voltage) 2 sec on 4 sec off, or 1 sec on 2 sec off optional for PLAR ON
FXS Tone	Alarm Tone: 480Hz/620Hz/-24dBm Ring Back Tone: 440Hz/480Hz/-19dBm

FXS functions	Basic functions: Battery Reverse, Loop Start, PLAR Optional functions: PLAR ON/PLAR bit programmable, Ground Start, and/or Metering Pulse
Signaling Bit A,B,C,D	Programmable bit

- All in-band signaling tones are carried transparently by the digitizing process.
- Customer is responsible for in-band signaling compatibility between a telephone and a switch, or between a PBX and a switch.
- FXS specification shown above support FXS hardware version N and up.


Clock and Alarm

CLKa Card Specifications

Clock Input (CLK1_In, CLK2_In)	2.048Mbps, 1.544Mbps, 2048KHz
Clock Output (CLK1_Out)	2.048Mbps, 1.544Mbps, 2048KHz
Alarm Output (Fuse, SYS_ALM)	Max. Current: 1A for 24VDC, 0.625A for 48VDC Fuse alarm, System alarm
LED Indicator	Multi-color LED indication

Application Illustrations

AM3440 Uplink/Downlink

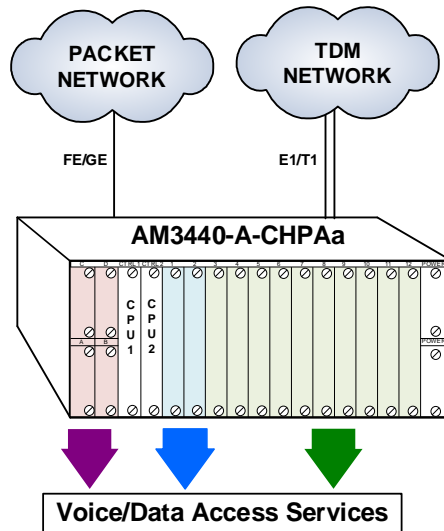

Mini-Slot plug-in Cards

- 1 - channel E1
- 1 - channel T1
- Mini Quad E1
- Mini Quad T1
- 2-LAN port/64-WAN port Router (RTA)
- 1 - channel Fiber Optical Interface
- 1 - channel DTE (1X.21, 1V.35, 1RS232)
- 1 - channel G.703 Co-Directional
- 3 - channel RS232
- 1 - channel OCU-DP
- ECA
- ABRA
- QMAGA*
- QFXOA
- QFXSA
- QEMA
- M1C37
- CLKa
- CLKb*
- CLKc*

High-Speed Single-Slot plug-in Cards


8 GbE interface plug-in module*

Low-Speed Single-Slot plug-in Cards

- 3 - channel E1
- 3 - channel T1
- 4 - channel E1
- 4 - channel T1
- 4 - channel C37.94
- 4 - channel C37.94 (SFP port)
- 2 - channel G. SHDSL w/o line power
- 4 - channel G SHDSL w/o line power
- 4 - channel TDM over Ethernet (TDMoEA)*
- 8 - channel Dry Contact I/O type B
- 8 - channel Dry Contact I/O type C
- 8 - channel Data Bridge
- 8 - channel OCU DP
- 8 - channel 2W/4W E&MA
- 12 - channel FXSA
- 12 - channel FXOA
- 12 - channel Magneto
- 8 - channel RS232 with X.50 substrate (8RS232)
- 8 - channel Subrate Data Unit (8SRU)*
- 8 - channel Universal DTE (8UDTEA)
- 6 - channel Universal DTE (6UDTEA)
- 6 - channel G.703 at 64 Kbps (6CDA)*
- 6 - channel RS232 with V.110 encoding (6RS232A)
- 8 - LAN - port / 64 - WAN - port Router (RTB)
- 1 - channel Fiber Optical Interface (1FOMA)


*Future option

ULSR Ring Application (E1)

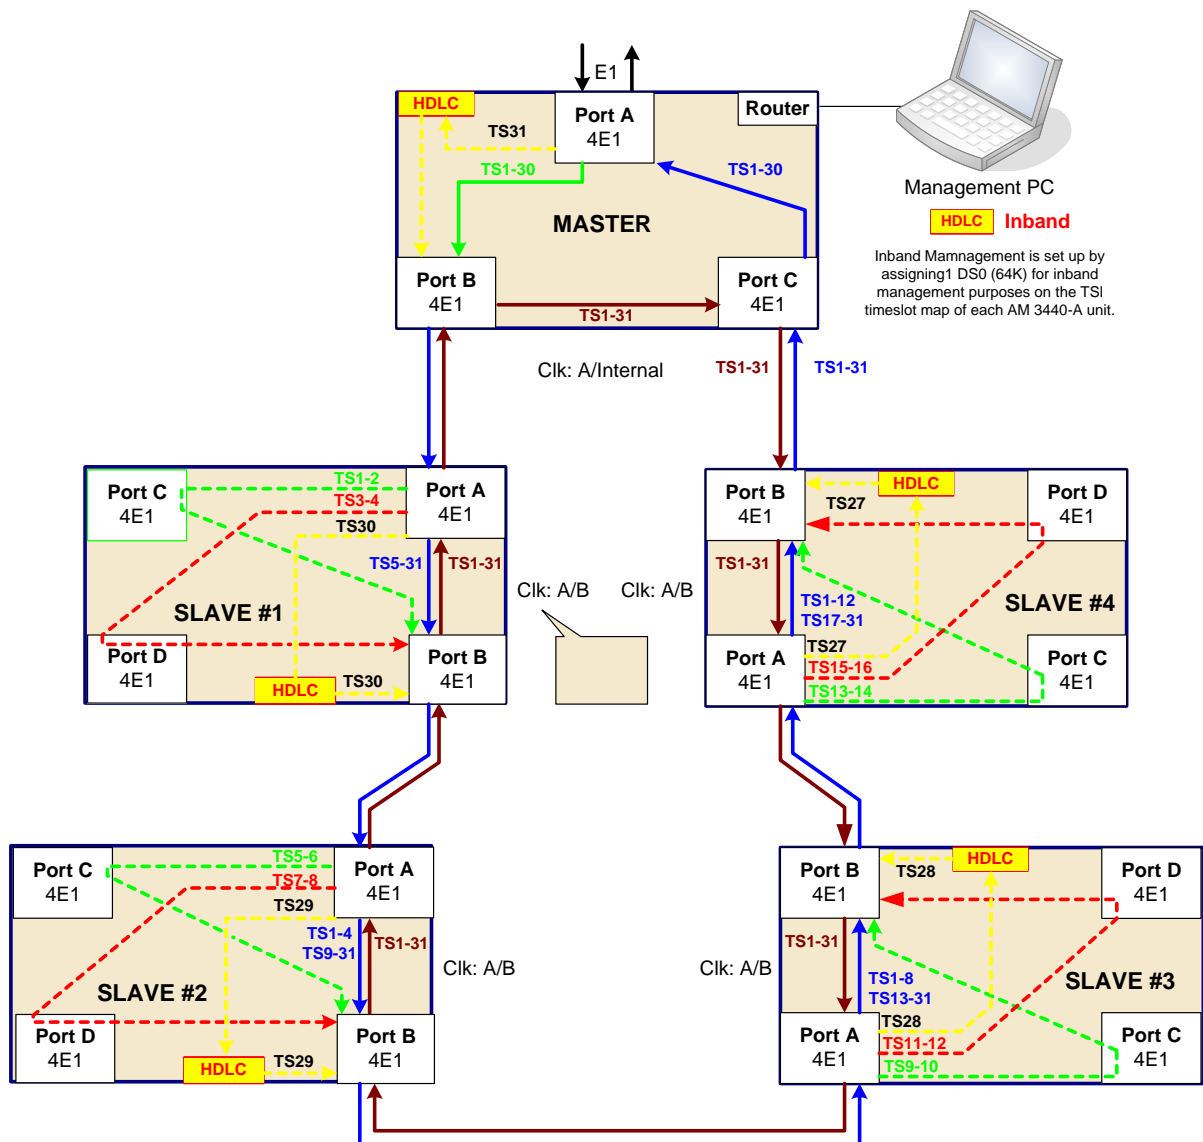


Note: ULSR ring does not support E1 unframed mode. Users must use E1 framed mode to set up a ULSR ring.

ULSR Ring Application (T1)

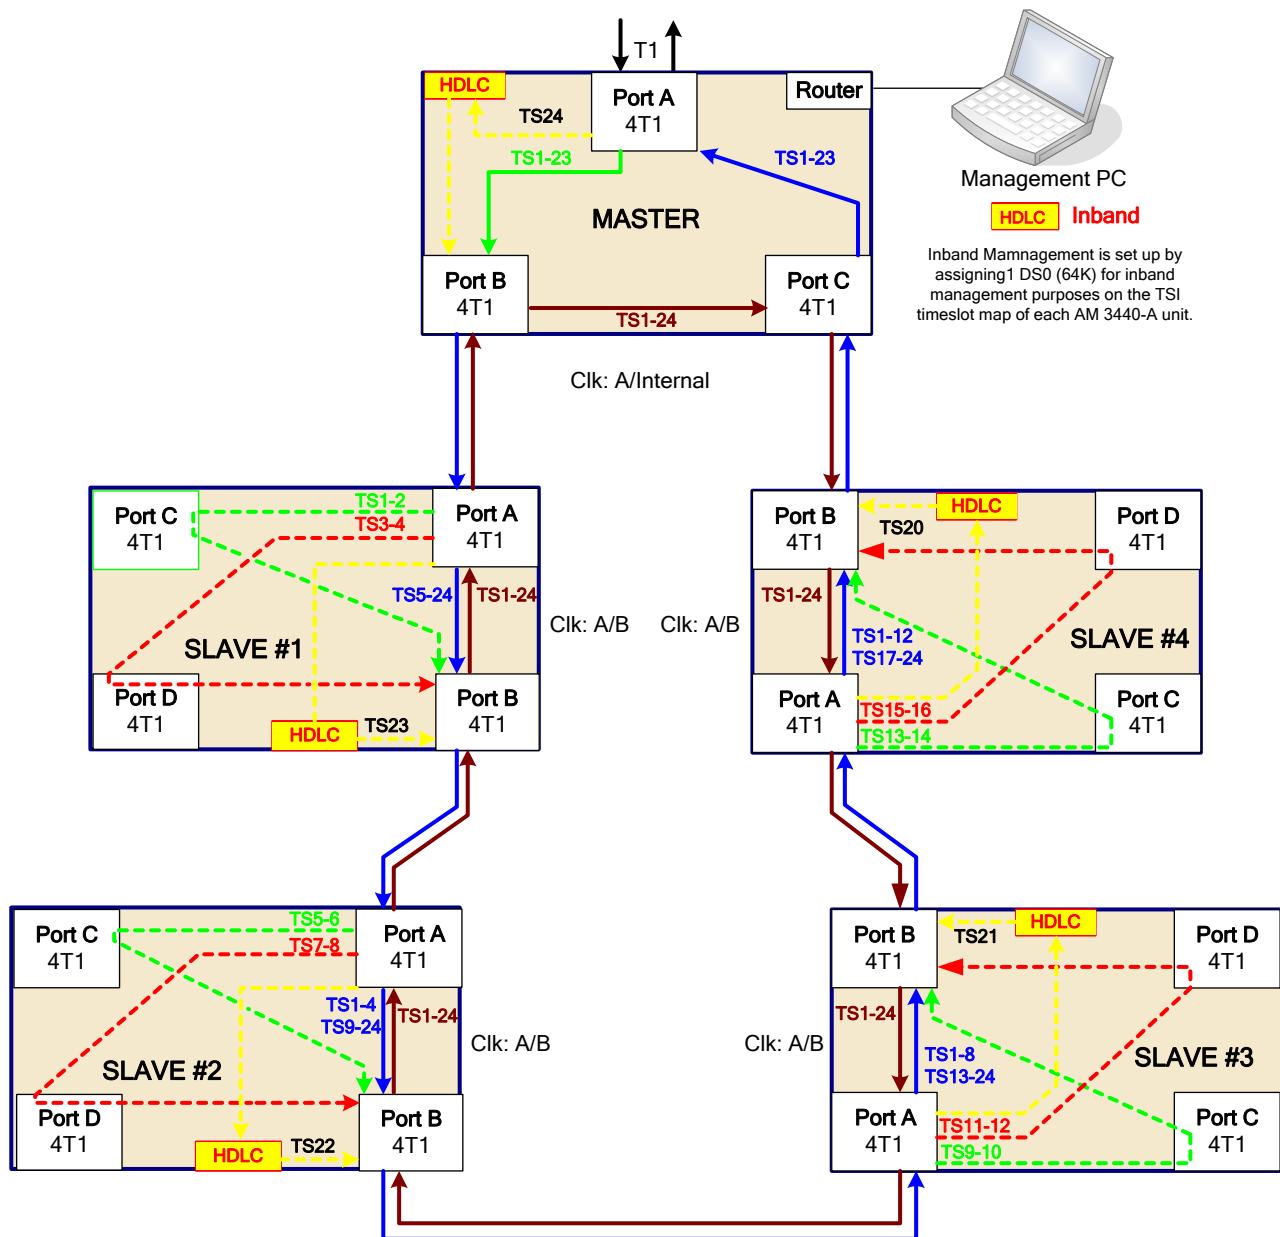

AM3440 ULSR Ring Application through E1/T1 Radio

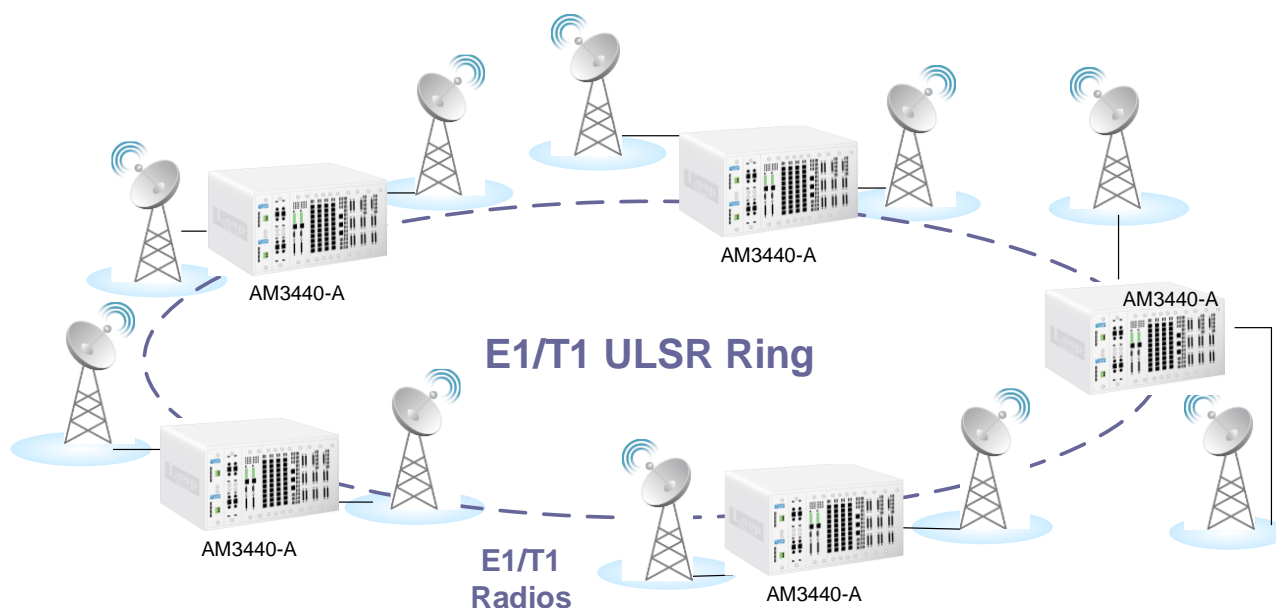

www.looptelecom.com

LOOP TELECOMMUNICATION INTERNATIONAL, INC.
ISO 9001 / ISO 14001 / ISO 27001

Worldwide

6F, No. 8, Hsin Ann Road
 Hsinchu Science Park
 Hsinchu, Taiwan 300092
 +886-3-578-7696

sales@looptelecom.com

Europe

128 Rue La Boetie,
 75008 Paris 08,
 France
 +33-663-71-72-73
 +33-667-67-10-45

eu_sales@looptelecom.com

Americas

8 Carrick Road
 Palm Beach Gardens
 Florida 33418, U.S.A.
 +1-561-627-7947

nca_sales@looptelecom.com

Australia & New Zealand

3 Imperial Ave, Mount
 Waverley, Victoria 3149,
 Australia
 +61-413-382-931

aus_sales@looptelecom.com

© 2023 Loop Telecommunication International, Inc.
 Version 139 January 2024

All Rights Reserved
 Subject to change without notice